

SM Transparency Catalog ▶ Polycor ▶ Limestone Floor and Pavers



POLYCOR

Limestone Floor and Pavers

Originating at the Polycor quarries and through production, limestones are manufactured to tiles and pavers with a wide range of finishes. Limestone is an inherently nonemitting source of VOCs and its durability allows it to perform impeccably in commercial & residential applications, interior or exterior.



Performance dashboard



Covers the wide selection of Polycor's heritage limestones and any surface finishes available

Covers interior flooring solutions to exterior paving products, from tiles to XL pavers

Has an unmatched durability and minimal maintenance needs

Visit Polycor for more product information

Limestones **Commercial Flooring** Walkways and patios Floor tile

Environment & materials

Improved by:

Polycor's commitment to carbon neutrality translates

Reduction of product's GWP

Reduction of product's energy intensity

Polycor's ownship of the chain of custody from quarries to plants ensures:

No child labor and forced labor

Materials remain 100% natural, free from chemicals or dyes

Certifications & rating systems:

Environmental Product Declaration (EPD)

Natural Stone Sustainability Standard (ANSI 373)

Health Product Declaration (HPD)

Polycor Limestone Flooring LCIA results show a 30% reduction in global warming potential impacts compared to the industry average.

This product-specific EPD compares results to the NSI industry-wide Type III EPD, a product group benchmark done in conformance with benchmarking guidance in the SM PCR and the SM Part B: Benchmarking Addendum.

MasterFormat® 09 30 33, 09 63 40, 32 14 40 **Limestone Floor and Pavers Guide Specs** For spec help, contact us or call 418.692.4695

See LCA, interpretation & rating systems

See materials, interpretation & rating systems





SM Transparency Report (EPD)™ - LEED 4.1 EPD Option 2. Optimization

VERIFICATION

3rd-party reviewed

3rd-party verified

LCA

declaration (EPD) was externally verified, according to ISO 21930:2017, SM Part A, and ISO

This environmental product

Transparency Report (EPD)



Validity: 2023/02/13 - 2028/02/13 Decl #: POL - 20230213 - 002

14025:2006, by Jack Geibig, President, Ecoform.

Ecoform, LLC 11903 Black Road, Knoxville, TN 37932

(865) 850-1883

SUMMARY

Reference PCR

Regions; system boundaries

North America; Cradle to grave

Functional unit / reference service life:

1 m² of floor covering; 75 years

LCIA methodology: TRACI 2.1

LCA software; LCI database SimaPro Developer 9.4

Ecolnvent 3.8, US-El 2.2

LCA conducted by: Sustainable Minds

Public LCA:

Life Cycle Assessment of Natural Stone Flooring for Polycor

Polycor Inc.

76 rue Saint-Paul, Suite 100 Quebec City (Quebec), Canada G1K 3V9 418-692-4695

Contact us

Limestone Floor and Pavers

LCA results & interpretation

SM Transparency Catalog ▶ Polycor ▶ Limestone Floor and Pavers

Life cycle assessment

○ Cradle to gate ○ Cradle to gate with options **♡** Cradle to grave

Scope and summary

Product description Limestone flooring can be applied as interior flooring, exterior flooring,

an elegant outlook. Limestone makes up 100% of the total mass of the

landscaping, and terracing. It tends to be durable and easy to maintain, with

flooring and is used in commercial, residential, and public sector buildings. The results in this study are presented for flooring with a thickness of 0.5 inches. However, this study applies to both interior flooring and exterior paving with a range of thicknesses and can be scaled using the scaling

factors on Page 4. **Functional unit** The functional unit is **one square meter** of floor covering. The amount of limestone needed to meet the functional unit is 18.20 kg.

The data for all limestone products were collected from Polycor's limestone

quarries and processing facilities covering a period of two years: January 2020 to December 2021. Data for limestone quarry operations were collected from four quarry sites across North America and two quarries from

After limestone is extracted from the quarry, it goes to a processing facility. Stone processor operations data were collected from three Polycor limestone processing sites across North America and grouped together as American limestone plants. • American limestone plants: three manufacturing facilities in Indiana. Data were collected from quarries and producers mainly operating in North

based on North American conditions. Default installation, packaging, and disposal scenarios Flooring is delivered at the job site ready for installation, where minor cuts may be necessary to accommodate design. Ancillary materials used in the

materials are structural enhancement components used as bonding agents or fillers for joints. Wood and cardboard used as packaging to safely deliver

the stone to the site is then transported to be either landfilled or recycled,

Material composition greater than 1% by weight **MATERIAL** AVG % WT. Limestone 100% Total impacts by life cycle stages [mPts/per func unit]

LIFE CYCLE STAGE

Installation

Use

Quarry and processor operations

Stone transport to building sites

MPTS/FUNC. UNIT

7.36E-01

1.46E-01

1.20E-01

8.10E-01

+76%

STONE TRANSPORT

A4 Transport to

1.46E-01 mPts

transportation


product to

used to transport

Truck

building sites

PERFORMANCE IMPROVEMENT

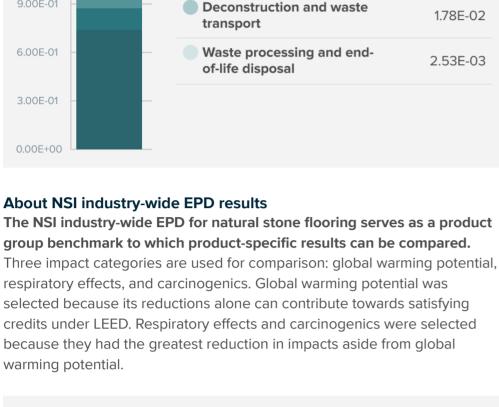

Carcinogenics (CTUh)

INDUSTRY POLYCOR

Ozone depletion potential

1.00E-06

8.00E-07

6.00E-07

2.00E-07

0.00E+00

(kg CFC-11 eq)

+19%


PERFORMANCE

IMPROVEMENT

4.00E-07

INDUSTRY POLYCOR

Global warming (kg CO2 eq)

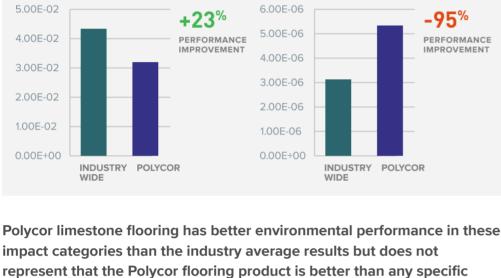

A3 Processor *Module D is excluded. operations

covering

PRODUCTION

OPERATIONS)

A1 Quarry

operations

processors

A2 Transport to

7.36E-01 mPts

Energy consumed

during stone

(electricity and

processing

For limestone flooring, the cradle-to-gate stage (A1-A3) dominates the results for all impact categories except eutrophication and respiratory effects. This study assessed a multitude of inventory and environmental

What's causing the greatest impacts

indicators. In addition to the six major impact categories (global warming

All life cycle stages

potential, ozone depletion, acidification, smog, eutrophication, and fossil fuel depletion), additional impact categories have also been included. These six impact categories are globally deemed mature enough to be included in Type III environmental declarations. Other categories are being developed and defined, and LCA should continue making advances in their development. However, the EPD users shall not use additional measures for comparative purposes. LCIA results are relative expressions and do not predict impacts on category endpoints, the exceeding of thresholds, safety margins or risks. Overall results are consistent with expectations for stone flooring's life cycles, with most of the impacts being generated during cradle-to-gate stages.

highest contributor to most of the impact categories, followed closely by the maintenance stage. The transportation of stone from quarries to processing plants, transportation of flooring from processing plants to the installation sites, and use of mortar during installation also generate

at the processing plants. The processor operations (A3) stage is the

The primary finding, across the environmental indicators, was that cradle-

to-gate stage (A1-A3) dominates the impacts due to the energy consumed

significant impacts in the overall life cycle impacts of limestone flooring. **Quarry operations and transport to processors** Impacts generated at limestone quarries (A1) are mainly due to the use of grid electricity and fuels in the quarries. Other material inputs generate little impact in comparison to the electricity and fuel consumed. The transportation of limestone from quarries to processing plants generates insignificant impacts in overall life cycle impacts.

contribution. The transportation of limestone flooring manufactured in processor plants to the building sites also has a considerable impact on the overall life cycle impacts of limestone flooring. Other life cycle stages Use of sealants for periodic resealing of limestone flooring and use of

contributions to the total life cycle impacts.

The lowest performing impact category (higher impact results than average) is ozone depletion. It is the only category where impacts were greater than the industry average. Since non-granite stone flooring requires re-sealing every five years, it was assumed that a silicone-based sealing for limestone flooring was applied as part of regular maintenance. The addition of the sealer contributed significantly when comparing Polycor to industry-average results. Other natural stone flooring

when the energy consumed during processing is varied by +/-20% from the estimate used in this study. The resulting variation in the total life cycle impacts is about 8%, implying that the system is not sensitive to this assumed value. Another parameter that affects the overall life cycle impacts is the thickness of limestone flooring. The thickness of stone flooring studied varied up to 2 inches. Results have been presented for a typical interior thickness of 0.5 inches, but as the functional mass of varies with the thickness, the impacts also vary. A sensitivity analysis has thus been

of natural stone in alignment with green building practices.

B4 Replacement

B5

B3 Repair

See how we make it greener

B6 Operational water use

8.10E-01 mPts

Sealants used for

periodic resealing.

8.01E-1.16E-09 08 **Product** Industry

1.99E-11

7.88E-10

8.52E-

1.98E-

Industry

½ product

1 product

1 product

1.5 products

1.5 products

1 point

05

02

2.53E-03 mPts

Landfilling after

the end of life.

09 CTU_h 1.80E-06 Non-7.07E-07 1.30Ecarcinogenics 07

Product

Industry

4.22E-07

Product

1.07E-07

1.13E-06

Industry

8.53E-07

6.90E-07

Product

1.44E-

6.80E-

2.85E-

04

01

Product

2.43E-07

Industry

5.06E

4.57E-

2.39E-

1.00E-01

10

08

04

Industry

impact category	Unit	Product	industry	Product	industry	Product	industry	Product	industry	Product	industry	Product	maustr
Fossil fuel depletion	MJ, LHV	1.62E+01	2.77E+01	7.05E+00	2.48E+00	2.46E+00	2.44E+00	2.00E+01	1.06E+01	8.58E- 01	1.24E+00	9.95E- 02	1.44E 01
Ecotoxicity	CTU _e @	45.5 %	72.7 %	7.9 %	2.0 %	2.4 %	1.8 %	43.2 %	22.4 %	1.0 %	1.0 %	0.0 %	0.0 %
e the addition	al content	required by	y the SM Pa	art B for inte	erior and ext	erior stone	flooring on	page 4 of th	ne Transpa	rency Rep	oort PDF.		
ee the addition	al content	required by	y the SM Pa	art B for inte	erior and ext	erior stone	flooring on	page 4 of th	ne Transpa	rency Rep	oort PDF.		
References		required by	y the SM Pa	art B for inte	erior and ext		flooring on Rating sy		ne Transpa	rency Rep	oort PDF.		

Building product disclosure and optimization April, 2022. Part B review conducted by the Sustainable Minds TAB, **Environmental product declarations** tab@sustainableminds.com **Option 1: Environmental Product Declaration**

on a life cycle basis. They are designed to present information transparently to make the limitations of comparability more understandable. A limitation to this study is that not all manufacturers in North America participated. TRs/EPDs of products that conform to the same PCR and include the same life cycle stages, but are made by different manufacturers, may not sufficiently align to support direct comparisons. They therefore, cannot be used as comparative assertions unless the conditions defined in ISO 14025 Section 6.7.2. 'Requirements for

SM Part B: Product group definition for Interior and exterior stone flooring,

building level, and therefore EPDs may not be used for comparability purposes when not considering the building energy use phase as instructed under the PCR. Full conformance with considered, when they comply with all referenced standards, use the same sub-category PCR, and use equivalent scenarios with respect to construction works. However, variations and deviations are possible. Example of variations: Different LCA software and background LCI data sets may lead to different results upstream or downstream of the life cycle stages declared. SM Transparency Report (EPD)™ - LEED 4.1 EPD Option 2. Optimization **VERIFICATION** LCA This environmental product **SUMMARY** declaration (EPD) was externally

mortar during installation also generate significant contributions to the overall life cycle impacts. Under normal operating conditions, limestone flooring requires not only monthly cleaning but also resealing every five years. Due to the nature of natural stone, it is anticipated that the limestone flooring products will last for the lifetime of the building. The reference service life (RSL) thus meets an ESL of 75 years, and flooring will need no replacements during its service life. End-of-life stages have lower

fabrication operations contribute significantly when comparing Polycor to industry-average results and identifying the contributors to performance

Polycor limestone flooring LCIA results show environmental

improvement and lowest performing impact categories.

activities. Sensitivity analysis Based on the recommendation provided by Polycor, impacts for processor operations specific to a square meter of limestone flooring was assumed to match the average stone processing for a square meter of limestone. A sensitivity analysis was performed to check the robustness of the results

extraction, recycles it, and also uses dry sawing technology in a growing number of quarry operations. In quarrying, production, installation and maintenance, natural stone lowers water use throughout its life cycle. Polycor is the leader within the Natural Stone Sustainability Standard (ANSI 373) with 25% of our sites certified. This standard examines and verifies numerous areas of natural stone production, effectively improving the baseline for the environmental and social performance

PROCESSING AND END-OF-LIFE DISPOSAL **B1** Use C3 Waste **A5** Installation **Deconstruction Processing B2** Maintenance C2 Waste C4 End of life disposal transport

Materials or processes contributing >20% to total impacts in each life cycle stage

			fuels).	t	ouilding site.								
TRACI v2.1 results per functional unit													
LIFE CYCLE STAGE	LIFE CYCLE STAGE A1-A3 PRODUCTION (QUARRY APROCESSO OPERATION		AND SOR	A4 STONE TRANSPORT TO BUILDING SITES		A5 INSTALLATION		B2 MAINTENANCE		C2 WASTE TRANSPORT		C4 END-OF-LIFE DISPOSAL	
Ecological c	lamage												
Impact category	Unit	Product	Industry	Product	Industry	Product	Industry	Product	Industry	Product	Industry	Product	Industry
Acidification	kg SO ₂ eq	6.13E-02	1.07E-01	1.08E-02	3.81E-03	1.18E-02	1.18E-02	6.58E-02	4.20E-02	1.32E- 03	1.91E- 03	4.53E- 04	6.57E- 04
Eutrophication	kg N eq	7.40E-03	1.51E-02	1.46E-03	5.13E-04	6.91E-04	6.87E-04	2.82E-02	2.61E-02	1.77E- 04	2.57E- 04	4.44E- 05	6.42E- 05
Global warming (Embodied carbon)	kg CO ₂ eq	9.18E+00	2.20E+01	3.46E+00	1.22E+00	2.56E+00	2.55E+00	7.28E+00	2.01E+00	4.21E- 01	6.10E- 01	4.70E- 02	6.80E- 02

1.24E-07

Product

1.70E-

1.97E-07

1.07E-

1.70E-01

03

Product

80

1.22E-07

Industry

1.70E-

1.97E-07

1.07E-

1.69E-01

03

Industry

08

4.80E-06

Product

9.90E-

1.06E-

1.96E-

8.74E-01

Product

80

06

02

1.51E-06

Industry

5.30E

5.65E-

1.49E

5.58E-

Industry

80

07

02

01

8.40E-

80

Product

1.75E-10

1.58E-

8.28E-

3.47E-

Product

80

05

02

1.22E-

07

Industry

2.54E-

2.29E-

1.20E-

5.02E-

Industry

10

80

04

02

1.20E-01 mPts

Use of ancillary

mortar) for

installation.

materials (mainly

kg PM_{2.5} Respiratory 1.24E-02 2.75E-02 effects eq 1.61E+00 2.46E+00 Smog kg O₃ eq

kg CFC-

11 eq 🚱

CTU_h

Human health damage

e the additional content required by the SM Part B for interior and exterior sto	ne flooring on page 4 of the Transparency Penort PDE
e the additional content required by the SWT art bilot interior and exterior sto	ne hoofing on page 4 of the Hansparency Report PDI .
References	Rating systems
LCA Background Report	
Polycor Natural Stone Flooring LCA Background Report (public version),	The intent is to reward project teams for selecting products from
Polycor 2023. SimaPro Analyst 9.4, ecoinvent 3.4 database.	manufacturers who have verified improved life-cycle environmental
	performance.
PCRs	LEED BD+C: New Construction v4 - LEED v4
	Building product disclosure and optimization

ISO 14025, "Sustainability in buildings and civil engineering works -- Core () Industry-wide (generic) EPD rules for environmental product declarations of construction products and services" ✓ Product-specific Type III EPD **Option 2. Embodied Carbon/LCA Optimization** The comparative analysis must show impact reduction(s) of at least

Comparability' are satisfied. Comparison of the environmental performance of building envelope thermal insulation using EPD information shall be based on the product's use and impacts at the the PCR for stone flooring allows EPD comparability only when all stages of a life cycle have been

baseline and includes a narrative describing how the impact reductions were achieved. ✓ Product-specific Type III EPD

BREEAM New Construction 2018

Environmental product declarations

Option 2: Multi-attribute optimization

Industry-wide (generic) EPD

✓ Product-specific Type III EPD

✓ Product-specific Type III EPD

Option 1: Environmental Product Declaration

LEED BD+C: New Construction | v4.1 - LEED v4.1

Mat 02 - Environmental impacts from construction products **Environmental Product Declarations (EPD)** Industry average EPD

 Multi-product specific EPD ✓ Product-specific EPD

10% in the global warming potential (GWP) impact category relative to

LCIA methodology: TRACI 2.1 LCA software; LCI database SimaPro Developer 9.4

Reference PCR 21930:2017, SM Part A, and ISO Regions; system boundaries

North America; Cradle to grave Functional unit / reference service life: 1 m² of floor covering; 75 years

Ecolnvent 3.8, US-El 2.2

Contact us

Manufacturing data

France and grouped as North American limestone quarries and French

quarries. Quarries in France are responsible for 5% of the total quarried stone and all the manufacturing facilities are located in North America.

America (mainly the US). As such, the geographical coverage for this study is

installation of the product include mortar, grout, and acrylate. These

following US EPA's end of life scenarios for containers and packaging. At the end of its useful life, the flooring is removed and transported to be landfilled.


1.80E+00 1.50E+00 1.20E+00

9.00E-01

Total impacts: Product-specific compared to industry-wide Highest and lowest performing impact categories

2.50E+01 2.00E+01 1.50E+01 1.00E+01 5.00E+00 0.00E+00 Respiratory effects (kg PM2.5 eq)

3.00E+01

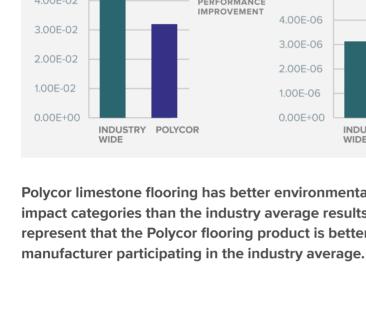

LCA results LIFE CYCLE STAGE

Information modules: Included (X)

Stages B1, B3-B7, C1, and C3 though

included, have no associated activities.

Excluded* (MND)

SM Single Score Learn about SM Single Score results Impacts of 1 square meter of floor

Ozone depletion Impact category Carcinogenics

Download PDF SM Transparency Report, which includes the additional EPD content required by the SM Part B.

3rd-party reviewed

3rd-party verified Validity: 2023/02/13 - 2028/02/13 Decl #: POL - 20230213 - 002

Transparency Report (EPD)

11903 Black Road, Knoxville, TN 37932 (865) 850-1883

© 2022 | The SM Transparency Report [EPD]™ Program is operated by Sustainable Minds® (www.sustainableminds.com) | Privacy policy

verified, according to ISO

President, Ecoform.

14025:2006, by Jack Geibig,

LCA conducted by: Sustainable Minds

Processor operations and transport to building sites Manufacturing operations at limestone processing plants make up the greatest impact share in many of the impact categories. Energy consumed at processors (both electricity and fuels) is responsible for the majority of impacts, while other material inputs have an insignificant

How our product compares to the industry benchmark Interpretation summary In November 2022, Natural Stone Institute (NSI)

published an industry-wide Type III EPD in which Polycor participated. It

followed the SM PCR and SM Part B Benchmarking addendum that enables

comparison of a product-specific EPD to the industry benchmark. The SM Part B benchmarking addendum requires the selection of the greatest

performance improvements across all impact categories evaluated in this study except for ozone depletion. The impact reductions primarily

stem from A3. Differences in electricity and fuel consumption during

improvement. manufacturers may or may not include this as part of their maintenance

conducted for various thicknesses of limestone flooring used for different flooring applications. For the thickness of 2 inches and larger, the variation in overall life cycle impacts is greater than 20%, implying that the system is sensitive to thickness value.

Natural stone is one of the lowest embodied carbon construction

Beyond embodied carbon, Polycor only uses rainwater for stone

make sure that we'll never stop improving it.

materials. Although we are proud of this intrinsic quality, we want to

B1-B7 WASTE AND WASTE TRANSPORT

> Refurbishment **B6** Operational energy use

> > 1.78E-02 mPts

Waste transport to

the landfill

centers.

1.38E-11

5.44E-

5.88E-

1.37E-02

Product

10

05

Additional environmental information

PCRs
ISO 21930:2017 serves as the core PCR along with EN 15804 and SM Part A.
SM Part A: Life Cycle Assessment Calculation Rules and Report Requirements, v2018
March, 2018. Document created by Joep Meijer, Naji Kasem, and Kim Lewis
and is managed and maintained by the Sustainable Minds Technical

SM Transparency Reports (TR) are ISO 14025 Type III environmental declarations (EPD) that enable purchasers and users to compare the potential environmental performance of products

Advisory Board (TAB) as outlined in ISO 14025:2006.

Ecoform, LLC

Public LCA:

Polycor Inc. 76 rue Saint-Paul, Suite 100 Quebec City (Quebec), Canada G1K 3V9 418-692-4695

.5 points .75 points Collapse all



How we make it greener

See LCA results by life cycle stage

Limestone Floor and Pavers

RAW MATERIALS ACQUISITION

Natural stone quarrying process has high yields and little excess material because the stone is close to surface. It's different from metal mining, where large amounts of earth must be removed to extract very little quantities. Also, underground quarrying, which has been perfected for generations at our Eureka Quarry, reduces land use and is a practice that Polycor wishes to extend to several quarries.

In addition, few consumables are needed to extract natural stone. Contrast that with other building materials, Polycor specifically focuses on sourcing the highest grades of natural stone so that, for instance, a black granite stone, doesn't need dyes to achieve its rich color.

From the bedrock to the point of sale, Polycor maintains an unbroken ownership of the supply chain allowing it to maintain standards of quality and practice.



TRANSPORTATION

Using stone from local sources is the single biggest opportunity to reduce its embodied carbon. Since natural stone is a heavy material, the environmental impacts for transporting it end up being one of its most significant source of carbon. Natural stone is sourced world-wide and each deposit has unique aesthetic and performance characteristics so this is not always avoidable. Be sure to understand the distances between the quarry, the processing facility, sometimes the distribution centers but also the transportation mode. In most of Polycor's operations, the quarry is within miles of the processing facility.



MANUFACTURING

Manufacturing natural stone is so simple that you can sumarize it by a single action, cutting. Cutting large piece into smaller pieces ending in a finished product. Also, the beauty of natural stone products is that there is no chemical mixed within our products. Therefore, they are inherently a non-emitting source of VOCs.

Recycling water is reused several times into the manufacturing process and is compulsory to achieve ANSI 373 Standard.

There are a large variety of sizes and finishes that are commonly used for natural stone. Design teams can help reducing energy consumption in the following ways: Usage of low embodied carbon finishes such as water jet, 3D analysis to loose as few stone as possible troughout it's transformation, accepting the natural variation in the material so there is more usable material.



OTHER (USE, END OF LIFE)

Whether you think of the Egyptian pyramids, the Colosseum of Rome, the cathedrals of the European capitals or closer to us; the famous Empire State building; natural stone is the most durable, classic and timeless building material on Earth. With 100+ years of durability, natural stone lasts longer than other building construction material and projects that use natural stone require less maintenance.

Since we don't use any chemicals, natural stone products as well as excess process materials throughout the extraction and transformation phases can be reused or recycled into gravel for roads, landscaping products and even furniture and jewelry. In short, natural stone can be reused and recycled multiple times during its life cycle; the only limit is your imagination!

Nevertheless, even if natural stone ends up in a construction landfill, there will be no toxic chemicals seeping into the earth as the material degrades. It simply returns to the earth, cradle to cradle.



SM Transparency Report (EPD)™ - LEED 4.1 EPD Option 2. Optimization

VERIFICATION

3rd-party reviewed

LCA

Transparency Report (EPD)

3rd-party verified

Validity: 2023/02/13 - 2028/02/13 Decl #: POL - 20230213 - 002

This environmental product declaration (EPD) was externally verified, according to ISO 21930:2017, SM Part A, and ISO 14025:2006, by Jack Geibig, President, Ecoform.

Ecoform, LLC 11903 Black Road, Knoxville, TN 37932

(865) 850-1883



SUMMARY Reference PCR

Regions; system boundaries

North America; Cradle to grave

Functional unit / reference service life:

1 m² of floor covering; 75 years LCIA methodology: TRACI 2.1

LCA software; LCI database

SimaPro Developer 9.4 EcoInvent 3.8, US-EI 2.2

LCA conducted by: Sustainable Minds

Polycor Inc.

76 rue Saint-Paul, Suite 100 Quebec City (Quebec), Canada G1K 3V9 418-692-4695

Contact us

Additional EPD content required by: SM Part B: Interior and Exterior Stone Flooring EPD Requirements

Data

Background This product-specific declaration was created by collecting data for one square meter of limestone floor covering. Material and production inputs from each quarry and processor site were used to calculate weighted averages of those inputs based on the production share of the site.

Allocation The allocation methods used were examined according to the updated allocation rules in ISO 21930:2017. Quarry inputs and outputs were divided evenly among the quarried limestone by mass, and no co-product allocation was needed. Similarly, no co-product allocation was required for processor operations as well since processing data was collected from Polycor's processing plants specific to limestone. The processor inputs and outputs were divided evenly among the processed stone by area.

Cut-off criteria for the inclusion of mass and energy flows are 1% of renewable primary resource (energy) usage, 1% nonrenewable primary resource (energy) usage, 1% of the total mass input of that unit process, and 1% of environmental impacts. The total of neglected input flows per module does not exceed 5% of energy usage, mass, and environmental impacts. No known flows are deliberately excluded from this declaration. Biogenic carbon is included in reported results.

Quality Primary data was collected for a time period of two years, which represents typical operations of Polycor's limestone quarry and processors across North America. Inventory data is considered to have a good precision and provide a representative depiction of the industry average. Data is also considered to be complete as no know flows are deliberately excluded from this analysis other than those defined to be outside of the system boundary. Proxy and generic datasets have been used for some materials and processes, but are considered to be $% \left\{ 1,2,\ldots,n\right\}$ sufficiently representative.

Quarry and Manufacturing Plant information

Data Group	Quarry location(s)				
North American Limestone Quarries	Adams Quarry, Bloomington, IN Empire Quarry, Oolitic, IN Eureka Quarry, Bedford, IN Victor Quarry, Bloomington, IN				
French Limestone Quarries (5% of the total quarried stone)	Massangis Quarry, Massangis, France Rocherons Quarry, Corgoloin et Comblanchien, France				
Data Group	Manufacturing Plant location(s)				
	Empire Plant, Oolitic, IN Eureka Plant, Bedford, IN Victor Plant, Bloomington, IN				
North American Limestone Plants	Eureka Plant, Bedford, IN				

Parameter	Unit	Test Method	Value			
CSI Masterformat classification	09 30 33; 09 63 40; 32 14 40					
Stone type	Limestone					
Stone grades	All grades					
Thickness to achieve functional unit	mm		12.70			
Product weight	kg		18.20			
Density	kg/m ³		2307			
Flexural strength	Мра	C880	3.45			
Modulus of rupture	MPa	C99	2.76			
Compressive strength	MPa	C170	12.41			
Thermal conductivity	W/m.k	C518	1.26			
Thermal resistance	m.K/W	C518	0.79			
Liquid water absorption	% of dry wt	C97	10-15			
Major system boundary	exclusions					

• Capital goods and infrastructure,

- Maintenance and operation of support equipment;
- Human labor and employee transport;
- Building operational energy and water use not associated with final product.

• Manufacture and transport of packaging materials not associated with final product;

5/16"

0.625

1/2"

1.0

- **Production flow chart**

Stone Quarrying — Use of explosives, power drills,

power saws, diamond belts etc. — stone blocks extracted from natural rock layers. Stone transport from quarries to processing facilities

Stone Processing — Stone blocks go through block saws,

Scaling factors

Conversion factor

Renewable secondary fuels

Non-renewable secondary

Hazardous waste disposed

Recovered energy

fuels

MJ, LHV

MJ, LHV

MJ, LHV

Output flows and waste category indicators (per m² of limestone flooring)

4.15E-03

Thickness

stone blocks processed to stone flooring and paving products.

saw slabs, bridge saws etc.-

Scenarios and additional technical information

Transport from Quarry to Processor (A2)

Based on the primary data, the transport distance between Polycor's limestone quarry and processing facilities varies, & the weighted distance is 36 km.

Transport to the building site (A4)

Parameter	Value	Unit
Vehicle type	Lorry, 16-32 to	on
Fuel type	Diesel	
Liters of fuel	0.41	l/100 km
Distance from manufacturer to installation site	800	km (per PCR)
Capacity utilization (mass based)	100	%
Gross density of products transported	2,207	kg/m ³
Capacity utilization volume factor	1	

Based on EPA's 2018 data, it has been assumed that 37% of all packaging will be landfilled, with the rest recycled.

Installation scrap assumed

Packaging scenario assumptions

Installation into the building (A5)

It is assumed that flooring fabrication (cutting and finishing to required size) is done at the processing plants and is typically delivered to the job site ready for installation. For the minor changes necessary to accommodate changes, we have considered the use of manual equipment like hackshaws, tile cutters, handle, chisels, tile nippers etc.

Ancillary materials -	Mortar	4.07	
	Grout	0.21	kg
	Acrylate	0.04	
Net freshwater consumption		0.0004	m^3
Electricity consumption		0	kWh
Product loss per functional unit (scrap)		0.91	kg
Waste materials at the construction site be processing (stone scrap and packaging was	1.86	kg	
Output materials from on-site waste proce	0	kg	
Mass of packaging waste by type	Cardboard Wood	0 2.53	kg
Biogenic carbon contained in packaging		4.64	kg CO ₂
Direct emissions to ambient air, soil and w	ater	0	kg
VOC emissions	0	μg/m³	
Transport distance for both stone scrap ar waste (Diesel-powered truck/trailer)	nd packaging	161	km

Maintenance process information	Cleaning and resealing the surface of limestone flooring				
Maintenance cycle	Monthly cleaning (900 cycles per RSL & ESL) Sealing every 5 years (14 cycles per RSL & ESL)				
Net freshwater consumption - municipal water supply	0.09 (for entire lifetime)	m ³			
Ancillary materials - Soar Sealan	,	kg kg			
Energy input during maintenance	Not necessary				
Reference service life informat	ion				

Reference Service Life (RSL)

Assumptions for

Maintenance scenario parameters

Design application parameters	Outdoor and indoor applications
Outdoor environment	Installation as recommended by manufacturer.
Indoor environment	Installation as recommended by manufacturer.
Use conditions	All conditions
End of life (C1-C4)	

The product is dismantled and removed from the building

75

years

5"

10.0

0

0

0

2.10E+01

4.15E-03

0

0

0

0

Assumptions for scenario development	manually. It is transported to a local facility where it require no further processing before final disposition.						
Collection process	Collected separately	0	kg				
	Collected with mixed construction waste	22.27	kg				
Recovery	Reuse	0	kg				
	Recycling (0%)	0	kg				
	Landfill (100%)	22.27	kg				
Waste transport		161	km				
Final disposal		22.27	kg				
Removals of biogenic carbon (excluding packaging) 0 kg CO ₂							
Hazardous waste							

as hazardous according to the Resource Conservation and Recovery Act (RCRA), Subtitle C.

Calcination CO₂ emissions Although calcination and carbonation is not relevant to limestone flooring products, calcination occurs during installation stage due to the use of mortar.

Polycor's limestone flooring does not contain substances that are identified

separately using a carbon intensity factor of 886 ${\rm CO}_2$ per ton of cement (Source: U.S. Cement Industry Carbon Intensities (2019).

1 1/2"

3.0

The results presented below have been reported for a flooring thickness of 0.5 inches. However, they may be scaled according to different thicknesses as desired using scaling factors. To calculate the results for additional thickness options, simply multiply the results by the corresponding conversion factor presented here:

8.0

2"

4.0

Mortar includes cement calcination ${\rm CO_2}$ emissions which is calculated & reported

Parameter Unit A4 A5 B2 B3-B7 C1 C2 C3 C4 **Total** LCIA results (per m² of limestone flooring)

LCIA results, resource use, output & waste flows, carbon emissions & removals per m² of limestone flooring

3/4"

1.5

Ozone depletion	kg CFC-11 eq	4.22E-07	6.90E-07	1.24E-07	0	4.80E-06	0	0	8.40E-08	0	8.01E-09	6.13E-06
Global warming	kg CO2 eq	9.18E+00	3.46E+00	2.56E+00	0	7.28E+00	0	0	4.21E-01	0	4.70E-02	2.29E+01
Smog	kg O3 eq	1.61E+00	2.85E-01	1.70E-01	0	8.74E-01	0	0	3.47E-02	0	1.37E-02	2.99E+00
Acidification	kg SO2 eq	6.13E-02	1.08E-02	1.18E-02	0	6.58E-02	0	0	1.32E-03	0	4.53E-04	1.52E-01
Eutrophication	kg N eq	7.40E-03	1.46E-03	6.91E-04	0	2.82E-02	0	0	1.77E-04	0	4.44E-05	3.80E-02
Carcinogenics	CTUh	1.07E-07	1.44E-09	1.70E-08	0	9.90E-08	0	0	1.75E-10	0	1.38E-11	2.25E-07
Non-carcinogenics	CTUh	7.70E-07	1.30E-07	1.97E-07	0	1.06E-06	0	0	1.58E-08	0	5.44E-10	2.17E-06
Respiratory effects	kg PM2.5 eq	1.24E-02	6.80E-04	1.07E-03	0	1.96E-02	0	0	8.28E-05	0	5.88E-05	3.39E-02
Ecotoxicity	CTUe	45.52%	7.9%	2.4%	0%	43.2%	0%	0%	1.0%	0%	0%	100%
Fossil fuel depletion	MJ surplus	1.62E+01	7.05E+00	2.46E+00	0	2.00E+01	0	0	8.58E-01	0	9.95E-02	4.66E+01
Resource use indicator	s (per m² o	f limeston	e flooring)									
Renewable primary energy used as energy carrier (fuel)	MJ, LHV	5.55E+01	7.21E-02	1.48E+00	0	2.07E+02	0	0	8.78E-03	0	1.35E-03	2.64E+02
Renewable primary resources with energy content used as material	MJ, LHV	1.72E+01	0	0	0	0	0	0	0	0	0	1.72E+01
Total use of renewable primary resources with energy content	MJ, LHV	7.28E+01	7.21E-02	1.48E+00	0	2.07E+02	0	0	8.78E-03	0	1.35E-03	2.81E+02
Non-renewable primary resources used as an energy carrier (fuel)	MJ, LHV	1.92E+02	4.64E+01	2.35E+01	0	1.94E+02	0	0	5.65E+00	0	6.58E101	4.62E+02
Non-renewable primary resources with energy content used as material	MJ, LHV	7.38E-02	0	0	0	0	0	0	0	0	0	7.38E-02
Total use of non-renewable primary resources with energy content	MJ, LHV	1.93E+02	4.64E+01	2.35E+01	0	1.94E+02	0	0	5.65E+00	0	6.58E101	4.62E+02
Secondary materials	kg	0	0	0	0	0	0	0	0	0	0	0

Use of net fresh water 5.50E+00 7.86E-03 2.10E+00 1.34E+01 0 1.15E-04 9.57E-04 resources

0

0

0

0

0

0

0

0

0

0

Non-hazardous waste disposed	kg	8.19E-02	0	2.69E+00	0	0	0	0	0	0	1.91E+01	2.19E+01
High-level radioactive waste, conditioned, to final repository	kg	8.33E-03	3.77E-06	3.10E-04	0	2.11E-03	0	0	4.59E-07	0	7.06E-08	1.08E-02
Intermediate- and low-level radioactive waste, conditioned, to final repository	kg	3.58E-05	3.96E-08	5.84E-07	0	1.26E-06	0	0	4.82E-09	0	7.44E-10	3.77E-05
Components for re-use	kg	0	0	0	0	0	0	0	0	0	0	0
Materials for recycling	kg	4.62E+01	0	2.35E+00	0	0	0	0	0	0	0	4.86E+01
Materials for energy recovery	kg	0	0	0	0	0	0	0	0	0	0	0
Exported energy	MJ, LHV	0	0	0	0	0	0	0	0	0	0	0

Carbon emissions and removals (per m ² of limestone flooring)												
Biogenic carbon removal from packaging	kg CO ₂	4.65E+00	0	2.32E-01	0	0	0	0	0	0	0	4.88E+00
Biogenic carbon emission from packaging	kg CO ₂	0	0	3.53E+00	0	0	0	0	0	0	0	3.53E+00
Biogenic carbon emission from combustion of waste from renewable sources used in production processes	kg CO ₂	0	0	0	0	0	0	0	0	0	0	0
Calcination carbon emissions	kg CO ₂	0	0	1.01E+00	0	0	0	0	0	0	0	1.01E+00
Carbon emissions from combustion of waste from non-renewable sources used in production processes	kg CO ₂	0	0	0	0	0	0	0	0	0	0	0