


AMERICAN BLACK™



● GRANITE

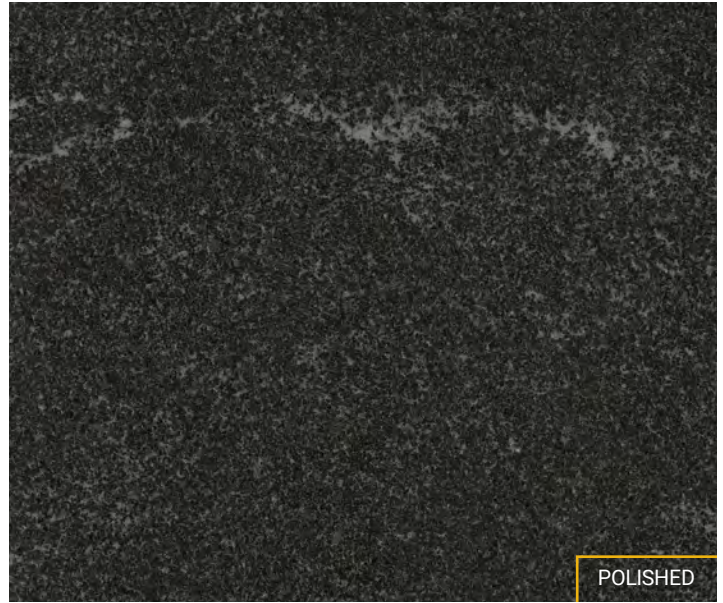

POLISHED

DESCRIPTION

This beautiful black granite with pronounced white veining has a marble-like quality in its vein pattern, with the durability of granite.

QUARRY OPERATING SINCE

1973

ANNUAL PRODUCTION

2,500 m³ and more
(88,287 cu. ft.)

AVAILABLE FINISHES


Polished	Waterjet
Antique	Propane flamed
Honed	Plasma flamed

APPLICATIONS

Exterior	Horizontal	Commercial
Interior	Vertical	Residential

PHYSICAL TEST RESULTS


		Imperial	Metric
Absorption by weight	ASTM C97	0.023%	0.023%
Density	ASTM C97	192.3 lb/ft ³	3 080.35 kg/m ³
Compressive strength	ASTM C170	43 524 Psi	300.09 MPa
Flexural strength	ASTM C880	3 560 Psi	24.5 MPa
Modulus of rupture	ASTM C99	3 799 Psi	26.19 MPa



PROPANE FLAMED



ANTIQUE

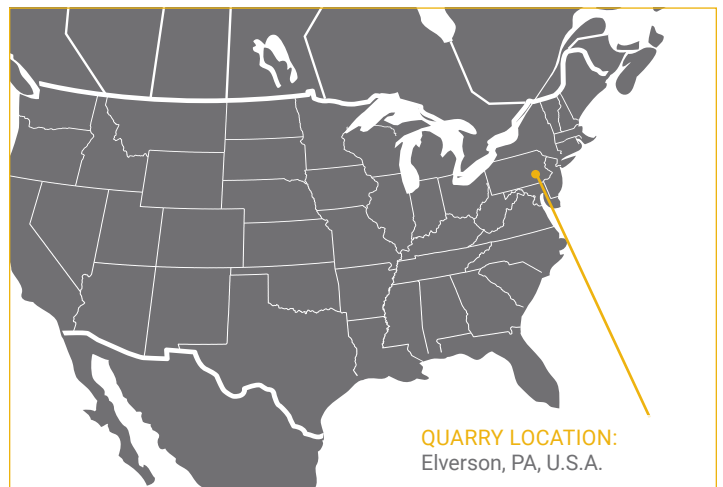

QUARRY LOCATION:
Elverson, PA, U.S.A.



POLYCOR
NATURAL STONE

QUARRY OWNERS | BLOCKS | SLABS | TILES | LANDSCAPING PRODUCTS | CURBS

polycor.com

Computer generated images and printed reproductions may not accurately match natural stone colors.

AMERICAN MIST™

● GRANITE



DESCRIPTION

This beautiful black granite with pronounced white veining is being utilized for smaller building projects when quality and durability are a must.

QUARRY OPERATING SINCE

1973

ANNUAL PRODUCTION

2,500 m³ and more
(88,287 cu. ft.)

AVAILABLE FINISHES


Polished	Honed	Propane flamed
Antique	Waterjet	Plasma flamed

APPLICATIONS


Exterior	Horizontal	Commercial
Interior	Vertical	Residential

PHYSICAL TEST RESULTS


		Imperial	Metric
Absorption by weight	ASTM C97	0.023%	0.023%
Density	ASTM C97	192.3 lb/ft³	3 080.35 kg/m³
Compressive strength	ASTM C170	43 524 Psi	300.09 MPa
Modulus of rupture	ASTM C99	3 799 Psi	26.19 MPa

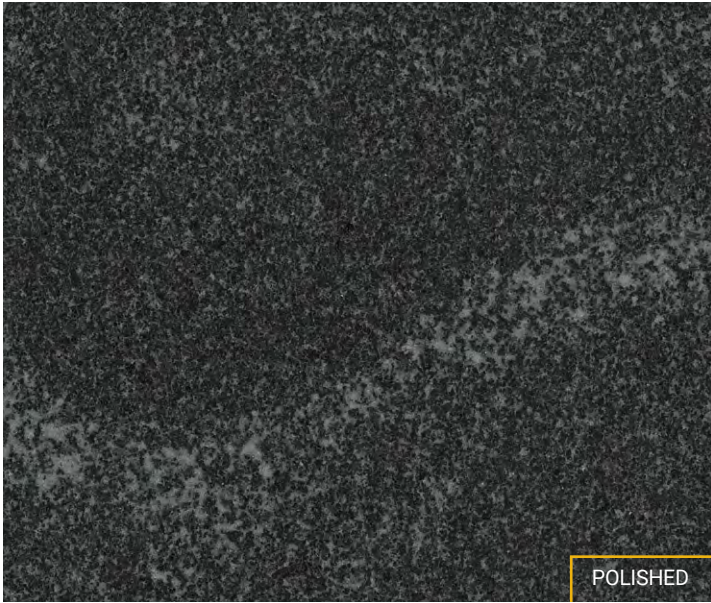


POLISHED



PROPANE FLAMED



ANTIQUÉ

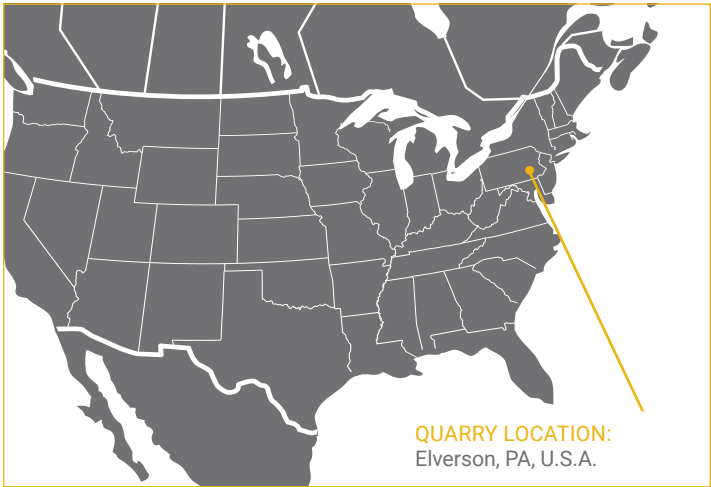

QUARRY LOCATION:
Elverson, PA, U.S.A.

BARRE GRAY™

● GRANITE



POLISHED

DESCRIPTION

Recognized around the world as the finest quality gray granite available, BARRE GRAY™ granite is the ultimate long-lasting choice in any finish. Its unique proportions of quartz and feldspar make it unusually durable, moisture-resistant and thermally stable.

QUARRY OPERATING SINCE

1880

ANNUAL PRODUCTION


9,000 m³ and more
(317,832 cu. ft.)

AVAILABLE FINISHES

Polished	Honed	Propane flamed
Antique	Sandblasted	Plasma flamed



PROPANE FLAMED




ANTIQUE

APPLICATIONS

Exterior	Horizontal	Commercial
Interior	Vertical	Residential

PHYSICAL TEST RESULTS

		Imperial	Metric
Absorption by weight	ASTM C97	0.23%	0.23%
Density	ASTM C97	165 lb/ft ³	2 651 kg/m ³
Compressive strength	ASTM C170	26 120 Psi	180.00 MPa
Flexural strength	ASTM C880	3 110 Psi	21.40MPa
Modulus of rupture	ASTM C99	3 300 Psi	22.70 MPa

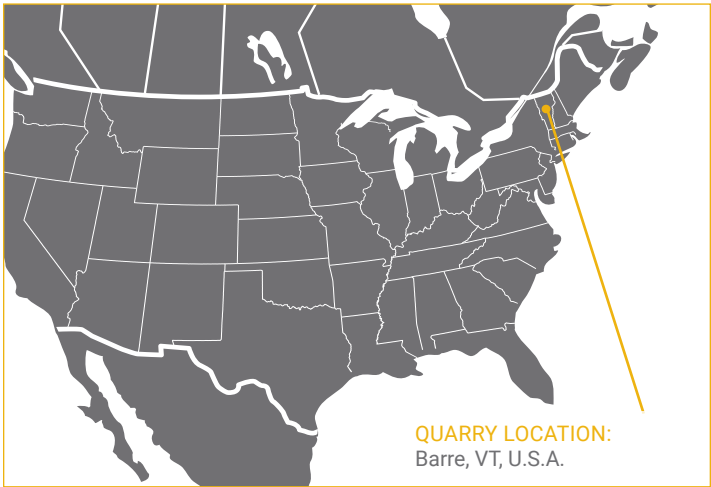

QUARRY LOCATION:
Barre, VT, U.S.A.




QUARRY OWNERS | BLOCKS | SLABS | TILES | LANDSCAPING PRODUCTS | CURBS

polycor.com

Computer generated images and printed reproductions may not accurately match natural stone colors.

BETHEL WHITE™

● GRANITE

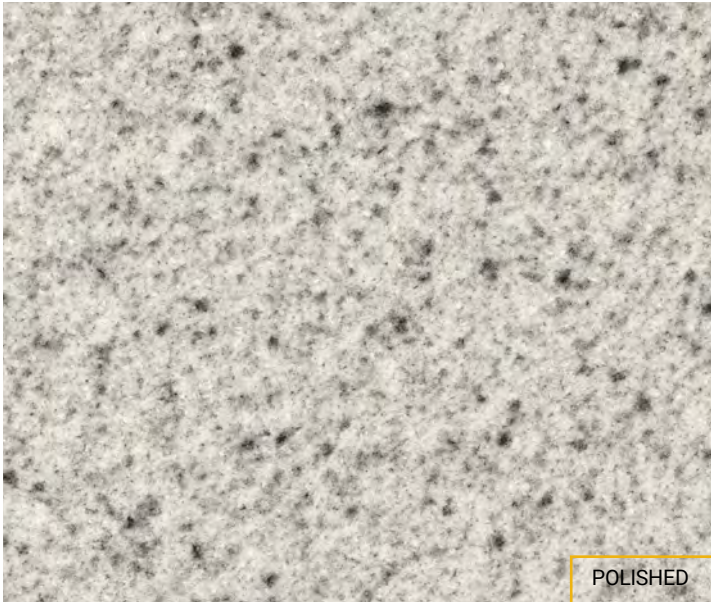

POLISHED

DESCRIPTION

BETHEL WHITE™ granite displays a flawless, even grain and purity of color that truly makes it the most prized in the world. It's the gold standard that all other white granites must measure up to.

QUARRY OPERATING SINCE

1900

ANNUAL PRODUCTION

4,000 m³ and more
(141,259 cu. ft.)

AVAILABLE FINISHES

Polished
Waterjet

Sandblasted
Propane flamed

APPLICATIONS

Exterior
Interior

Horizontal
Vertical

Commercial
Residential




PROPANE FLAMED



SANDBLASTED

PHYSICAL TEST RESULTS

		Imperial	Metric
Absorption by weight	ASTM C97	0.256%	0.256%
Density	ASTM C97	164.4 lb/ft ³	2 633.44 kg/m ³
Compressive strength	ASTM C170	34 027 Psi	234.61 MPa
Flexural strength	ASTM C880	1 754 Psi	12.1 MPa
Modulus of rupture	ASTM C99	1 937 Psi	13.36 MPa

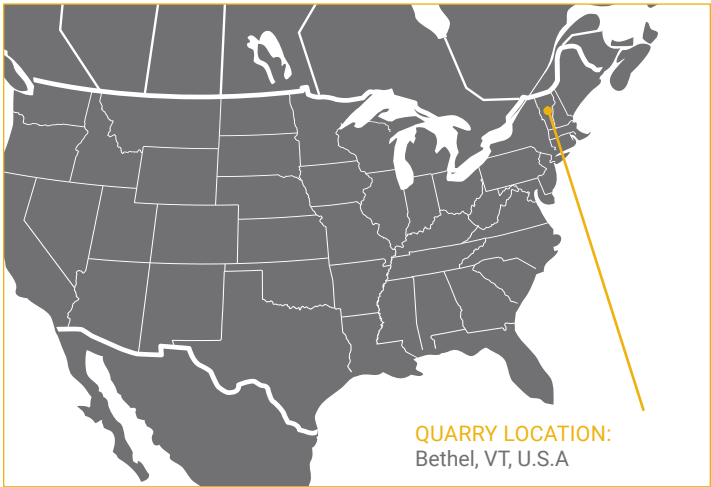

QUARRY LOCATION:
Bethel, VT, U.S.A



POLISHED

DESCRIPTION

CALEDONIA™ granite is a 100% Quebec-made product and is a Canadian emblem. It is known for its color consistency, making it a good choice of granite for multistage projects. Often sought for big projects, this granite is valued in Asia, primarily in Japan, China and Korea. It is also used in Quebec for curbs, thanks to its durability.

QUARRY OPERATING SINCE

1880

ANNUAL PRODUCTION

10,000 m³ and more
(350,000 cu. ft.)

AVAILABLE FINISHES

Polished	Flamed
Antique	Waterjet

APPLICATIONS

Exterior	Vertical	Curbs
Interior	Commercial	Pavers
Horizontal	Residential	

PHYSICAL TEST RESULTS

		Imperial	Metric
Absorption by weight	ASTM C97	0.12%	0.12%
Density	ASTM C97	169 lb/pi³	2 708 kg/m³
Compressive strength	ASTM C170	24 210 Psi	166.90 MPa
Flexural strength	ASTM C880	1 4330 Psi	9.8 MPa
Modulus of rupture	ASTM C99	1 600 Psi	11.1 MPa



PROPANE FLAMED



ANTIQUE




QUARRY LOCATION:
Rivière-à-Pierre, QC, Canada

ANSI/NSC 373 Certified Quarry since **2019**

CAMBRIAN BLACK™



● GRANITE

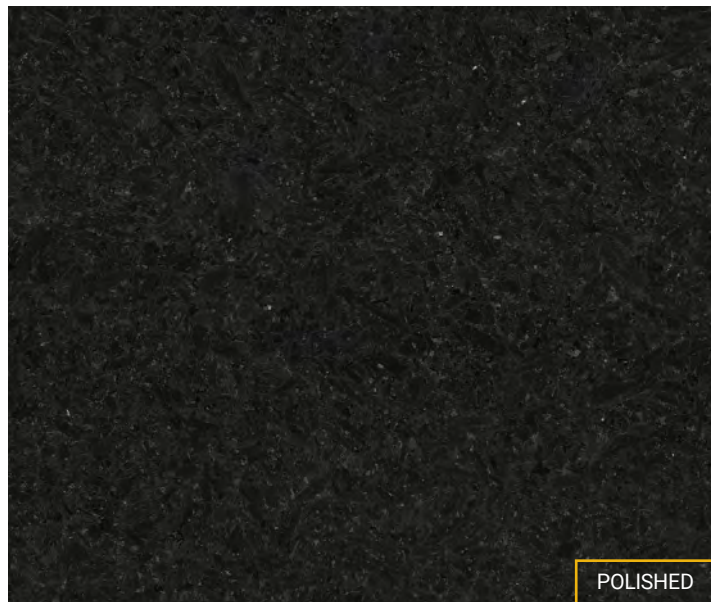

POLISHED

DESCRIPTION

A great Canadian classic, this timeless granite comes from a quarry that is exclusive to Polycor. It's also one of the few black granites that don't require any resin or dye, making it ideal for countless applications.

QUARRY OPERATING SINCE

1980

ANNUAL PRODUCTION

5,000 m³ and more
(180,000 cu. ft.)

AVAILABLE FINISHES

Antique	Flamed and washed	Waterjet
Honed	Polished	
Flamed	Sandblasted	

APPLICATIONS

Exterior	Vertical	Memorial
Interior	Commercial	
Horizontal	Residential	

PHYSICAL TEST RESULTS


		Imperial	Metric
Absorption by weight	ASTM C97	0.09%	0.09%
Density	ASTM C97	177.9 lb/ft ³	2 850 kg/m ³
Compressive strength	ASTM C170	21 450 Psi	147.9 MPa
Flexural strength	ASTM C880	1 670 Psi	11.5 MPa
Modulus of rupture	ASTM C99	1 980 Psi	13.7 MPa



PROPANE FLAMED



ANTIQUE

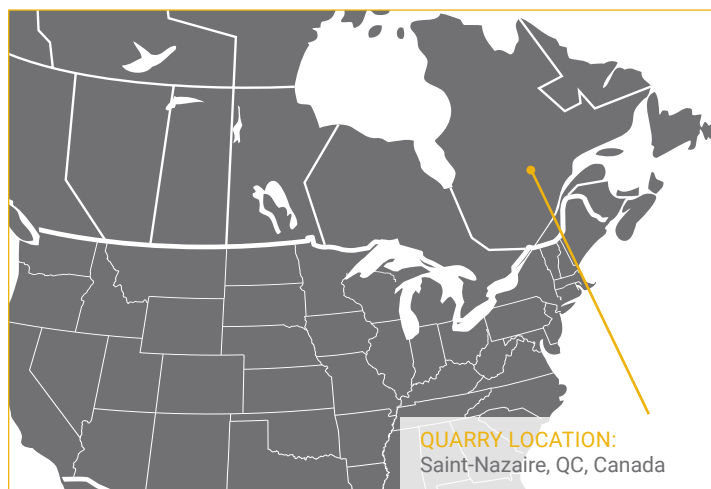

QUARRY LOCATION:
Saint-Nazaire, QC, Canada

ANSI/NSC 373 Certified Quarry since **2018**



POLYCOR
NATURAL STONE

QUARRY OWNERS | BLOCKS | SLABS | TILES | LANDSCAPING PRODUCTS | CURBS


polycor.com

Computer generated images and printed reproductions may not accurately match natural stone colors.

EASTERN GRAY™



● GRANITE

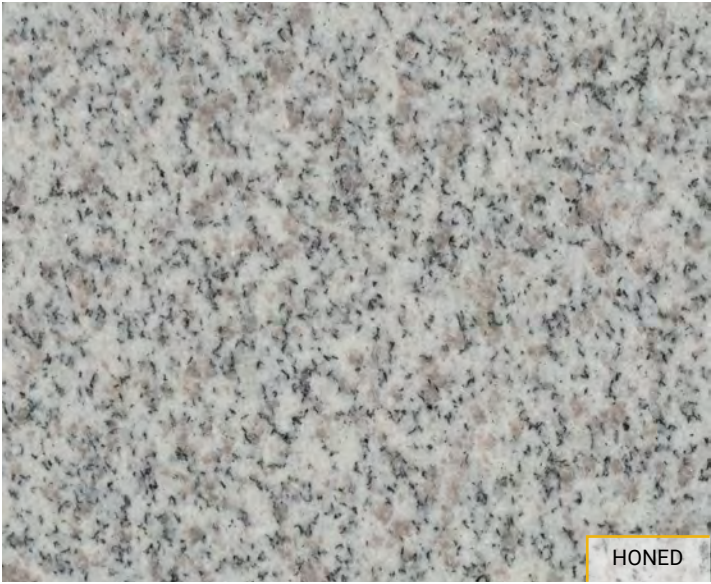

HONED

DESCRIPTION

An iconic, signature granite that has been used on projects around the world. Known for its unmistakable, predominantly white color, this granite also includes light gray, medium grain specks mixed throughout.

QUARRY OPERATING SINCE

1889

ANNUAL PRODUCTION

10,000 m³ and more
(355,000 cu. ft.)

AVAILABLE FINISHES

Polished	Waterjet	Sandblasted
Antique	Propane flamed	
Honed	Plasma flamed	

APPLICATIONS


Exterior	Vertical	Curbs
Interior	Commercial	Pavers
Horizontal	Residential	

PHYSICAL TEST RESULTS

		Imperial	Metric
Absorption by weight	ASTM C97	0.182%	0.182%
Density	ASTM C97	164.01 lb/ft ³	2 627.19 kg/m ³
Compressive strength	ASTM C170	34 789 Psi	239.90 MPa
Flexural strength	ASTM C880	2 557 Psi	17.63 MPa
Modulus of rupture	ASTM C99	2 097 Psi	14.46 MPa



POLISHED

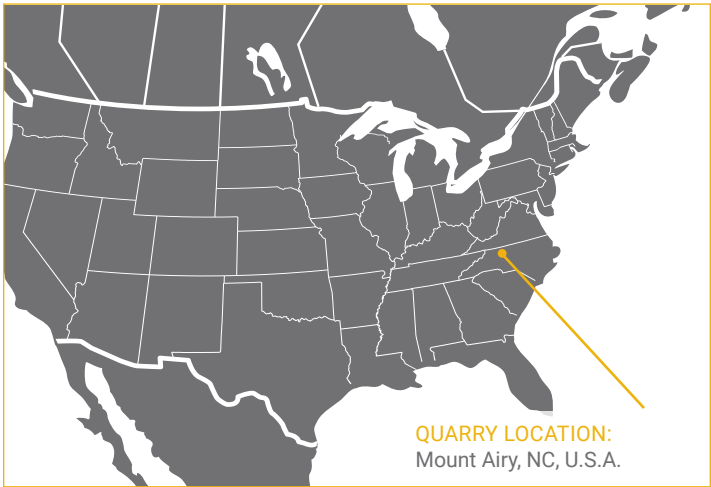

QUARRY LOCATION:
Mount Airy, NC, U.S.A.



QUARRY OWNERS | BLOCKS | SLABS | TILES | LANDSCAPING PRODUCTS | CURBS

polycor.com

Computer generated images and printed reproductions may not accurately match natural stone colors.

ELBERTON GRAY™



● GRANITE



DESCRIPTION

ELBERTON GRAY™ granite is a premium, fine-grained, blue-gray, and medium-grey stone quarried in Elberton, Georgia, known as the "Granite Capital of the World". Extracted from a vast underground deposit 35 miles long and 6 miles wide, with a depth of 2 to 3 miles, it is highly prized for its consistent texture, durability, and strength. Due to its high compressive strength and resistance to weathering, it is considered an ideal, long-lasting, and aesthetically pleasing building stone for curbing, paving, facades and landscaping.

QUARRY OPERATING SINCE
1882

ANNUAL PRODUCTION
8,725 m³ and more
(308,120 cu. ft.)

AVAILABLE FINISHES

Polished Honed Propane flamed

APPLICATIONS

Interior Commercial Curbing
Horizontal Residential
Vertical Exterior

PHYSICAL TEST RESULTS

		Imperial	Metric
Absorption by weight	ASTM C97	0.30%	0.30%
Density	ASTM C97	163.7 lb/ft³	2 622.22 kg/m³
Compressive strength	ASTM C170	21 430 Psi	147.8 MPa
Flexural strength	ASTM C880	1 334 Psi	9.19 MPa
Modulus of rupture	ASTM C99	1 425 Psi	9.82 MPa




POLISHED



PROPANE FLAMED



HONED

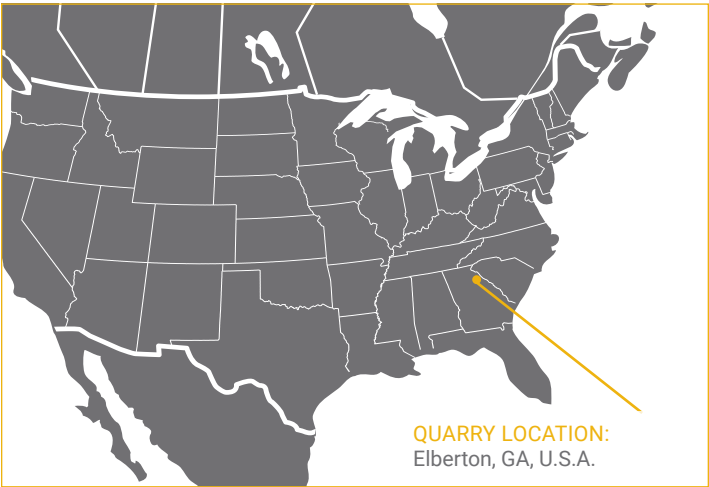


QUARRY LOCATION:
Elberton, GA, U.S.A.



QUARRY OWNERS | BLOCKS | SLABS | TILES | LANDSCAPING PRODUCTS | CURBS

polycor.com

Computer generated images and printed reproductions may not accurately match natural stone colors.

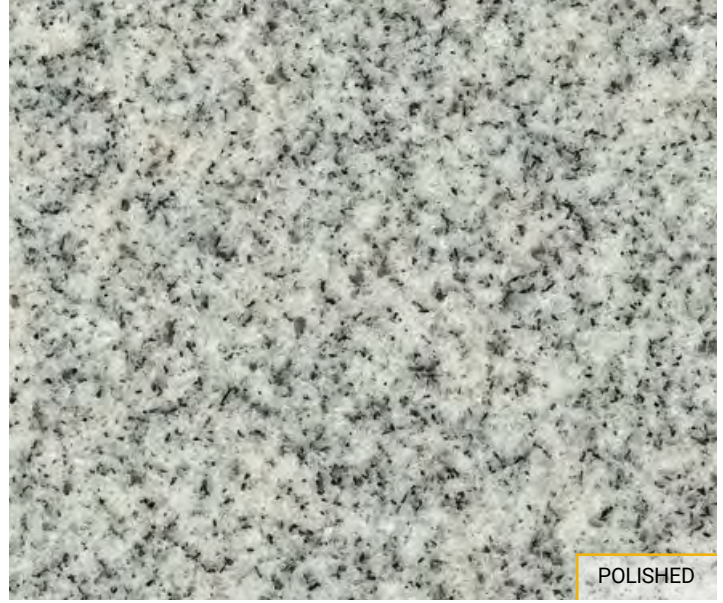

POLISHED

DESCRIPTION

This clear and homogeneous granite can be easily controlled and can even become ultra white in a thermal finish. Often used in architectural projects such as monuments and curbs in the United States because of its good structural properties and excellent durability.

QUARRY OPERATING SINCE

1912

ANNUAL PRODUCTION

On demand

AVAILABLE FINISHES

Polished	Waterjet	Sandblasted
Antique	Propane flamed	
Honed	Plasma flamed	

APPLICATIONS


Exterior	Vertical	Curbs
Interior	Commercial	Pavers
Horizontal	Residential	

PHYSICAL TEST RESULTS

		Imperial	Metric
Absorption by weight	ASTM C97	0.27%	0.27%
Density	ASTM C97	164.18 lb/ft ³	2 630.00 kg/m ³
Compressive strength	ASTM C170	27 700 Psi	190.98 MPa
Flexural strength	ASTM C880	2 020 Psi	13.92 MPa
Modulus of rupture	ASTM C99	2 225 Psi	15.34 MPa



PROPANE FLAMED

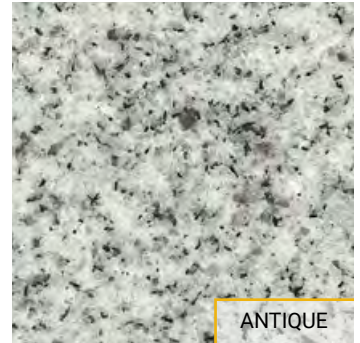

ANTIQUE



QUARRY LOCATION:
Jay, ME, U.S.A.



POLYCOR
NATURAL STONE


QUARRY OWNERS | BLOCKS | SLABS | TILES | LANDSCAPING PRODUCTS | CURBS

polycor.com

Computer generated images and printed reproductions may not accurately match natural stone colors.

KODIAK BROWN™

● GRANITE

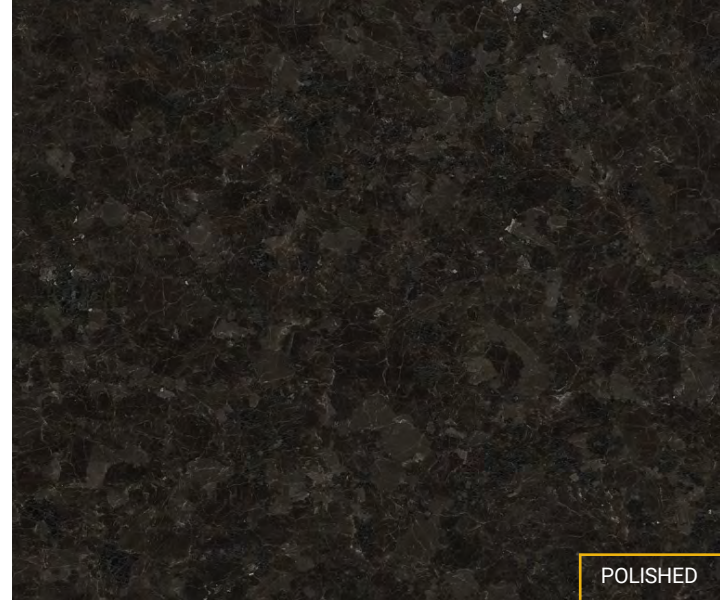

POLISHED

DESCRIPTION

This granite is a treasure from the Canadian mountains. Often compared to Antique Brown, it's the ideal granite for countertops. Its deep brown and black hues lend warmth to any design.

QUARRY OPERATING SINCE

2002

ANNUAL PRODUCTION

900 m³ and more
(30,000 cu. ft.)

AVAILABLE FINISHES


Polished
Antique

Honed
Waterjet

Flamed



PROPANE FLAMED

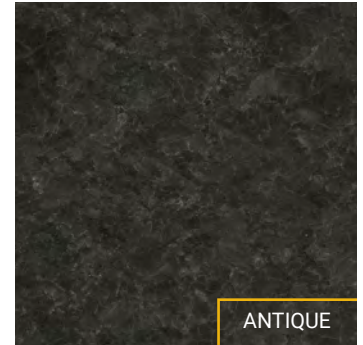

ANTIQUE

APPLICATIONS


Exterior
Interior

Horizontal
Vertical

Commercial
Residential

PHYSICAL TEST RESULTS

		Imperial	Metric
Absorption by weight	ASTM C97	0.10%	0.10%
Density	ASTM C97	171 lb/ft ³	2 739.16 kg/m ³
Compressive strength	ASTM C170	25 525 Psi	175.99 MPa
Flexural strength	ASTM C880	1 813 Psi	12.5 MPa
Modulus of rupture	ASTM C99	2 248 Psi	15.50 MPa

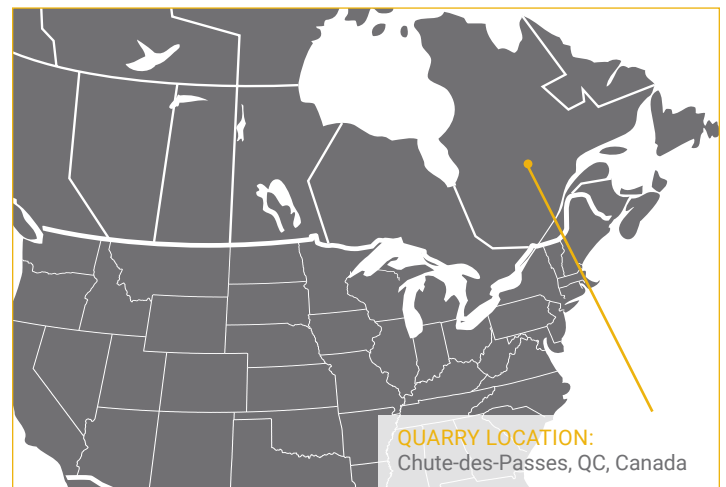

QUARRY LOCATION:
Chute-des-Passes, QC, Canada



QUARRY OWNERS | BLOCKS | SLABS | TILES | LANDSCAPING PRODUCTS | CURBS

polycor.com

Computer generated images and printed reproductions may not accurately match natural stone colors.

LAURENTIAN GREEN™

● GRANITE



POLISHED

DESCRIPTION

A Polycor exclusive granite, perfect for architectural projects because of its homogeneity, LAURENTIAN GREEN™ granite remains a good choice for residential applications. While similarly tinted stones may oxidize, this granite keeps its opaque dark-green color, flecked with blue quartz.

QUARRY OPERATING SINCE

1991

ANNUAL PRODUCTION

1,800 m³ and more
(65,000 cu. ft.)

AVAILABLE FINISHES

Polished	Honed	Flamed
Antique	Waterjet	



PROPANE FLAMED



ANTIQUE

APPLICATIONS

Exterior	Horizontal	Commercial
Interior	Vertical	Residential

PHYSICAL TEST RESULTS

		Imperial	Metric
Absorption by weight	ASTM C97	0.12%	0.12%
Density	ASTM C97	177.9 lb/ft ³	2 849.68 kg/m ³
Compressive strength	ASTM C170	22 038 Psi	151.95 MPa
Flexural strength	ASTM C880	1 754 Psi	12.1 MPa
Modulus of rupture	ASTM C99	1 707 Psi	11.77 MPa



QUARRY LOCATION:
Lac Morin, QC, Canada



QUARRY OWNERS | BLOCKS | SLABS | TILES | LANDSCAPING PRODUCTS | CURBS

polycor.com

Computer generated images and printed reproductions may not accurately match natural stone colors.

LAURENTIAN ROSE™

● GRANITE



DESCRIPTION

This exceptional granite has been carefully selected for its outstanding natural deep rose color and quality. The fine grain size of the LAURENTIAN ROSE™ granite allows it to be delicately carved and lettered with incredible contrast.

QUARRY OPERATING SINCE

1913

ANNUAL PRODUCTION

600 m³ and more
(21,000 cu. ft.)

AVAILABLE FINISHES

Polished	Honed
Antique	Plasma flamed

APPLICATIONS

Exterior	Horizontal	Commercial
Interior	Vertical	Residential

PHYSICAL TEST RESULTS


		Imperial	Metric
Absorption by weight	ASTM C97	0.19%	0.19%
Density	ASTM C97	166 lb/ft ³	2 665 kg/m ³
Compressive strength	ASTM C170	27 660 Psi	190.7 MPa
Modulus of rupture	ASTM C99	1 890 Psi	13.00 MPa
Flexural strength	ASTM C880	1 500 Psi	10.30 MPa




POLISHED



PLASMA FLAMED



ANTIQUE

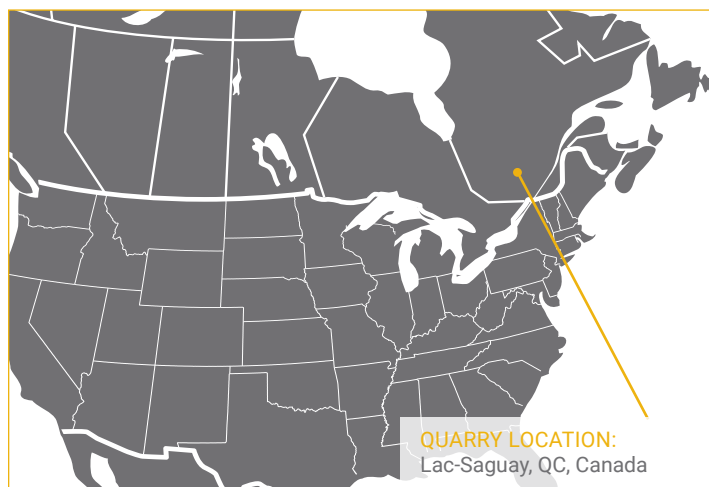

QUARRY LOCATION:
Lac-Saguay, QC, Canada

MAYBERRY MIST™



● GRANITE



COMING SOON

DESCRIPTION

Quarried in Mount Airy, NC, **MAYBERRY MIST™** is a white-gray granite with movement that adds character to any design. Ideal for curbing and landscaping projects, its unique features enhance the aesthetic of any public spaces.

QUARRY OPERATING SINCE

1889

ANNUAL PRODUCTION

10,000 m³ and more
(355,000 cu. ft.)

AVAILABLE FINISHES

Polished	Waterjet	Sandblasted
Antique	Propane flamed	
Honed	Plasma flamed	

APPLICATIONS

Exterior	Vertical	Curbs
Interior	Commercial	Pavers
Horizontal	Residential	

PHYSICAL TEST RESULTS


		Imperial	Metric
Absorption by weight	ASTM C97	0.182%	0.182%
Density	ASTM C97	164.01 lb/ft³	2 627.19 kg/m³
Compressive strength	ASTM C170	34 789 Psi	239.90 MPa
Flexural strength	ASTM C880	2 557 Psi	17.63 MPa
Modulus of rupture	ASTM C99	2 097 Psi	14.46 MPa

NATURALLY SUSTAINABLE™

Health Product Declaration® available **2020**



SAWN

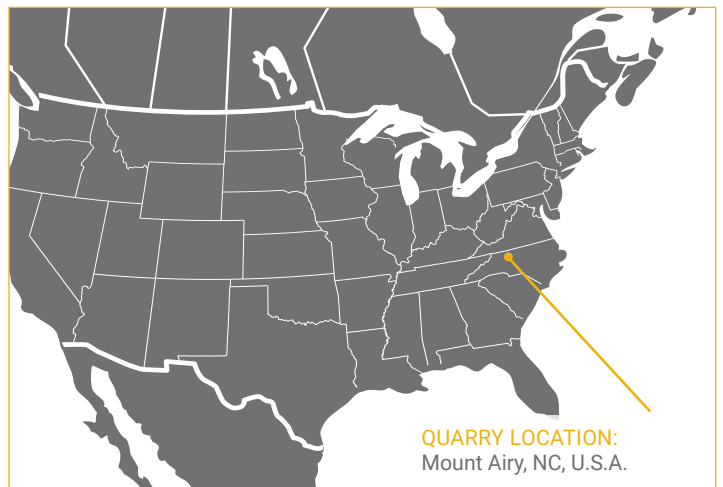

QUARRY LOCATION:
Mount Airy, NC, U.S.A.




POLYCOR
NATURAL STONE

QUARRY OWNERS | BLOCKS | SLABS | TILES | LANDSCAPING PRODUCTS | CURBS

polycor.com

Computer generated images and printed reproductions may not accurately match natural stone colors.

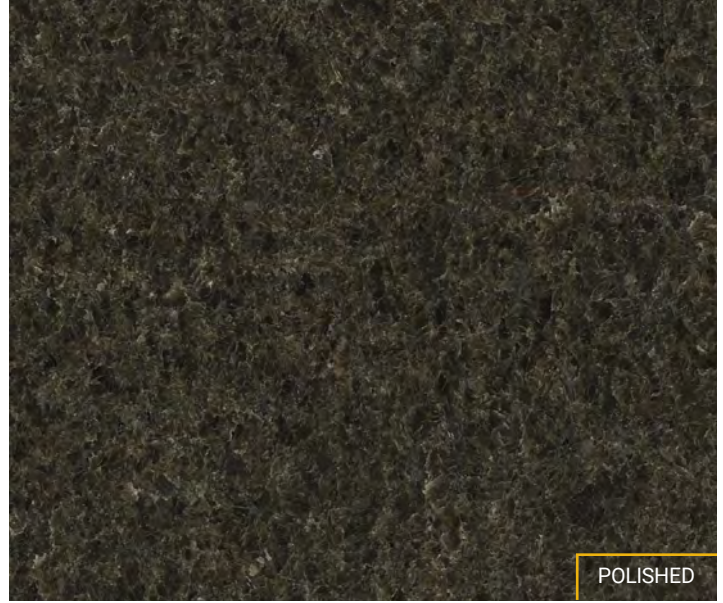

POLISHED

DESCRIPTION

With its neutral hues, this beautiful Canadian stone is a Polycor exclusive. Consistent and homogenous in color, it is easy to work this stone from every angle. It is recognizable for its neutral background color and thin orange surface veins. No other stone like this is available on the market, and it is a customer favorite for architectural projects.

QUARRY OPERATING SINCE

2000

ANNUAL PRODUCTION

3,600 m³ and more
(127,000 cu. ft.)

AVAILABLE FINISHES

Polished	Honed	Flamed
Antique	Waterjet	

APPLICATIONS


Exterior	Horizontal	Commercial
Interior	Vertical	Residential

PHYSICAL TEST RESULTS


		Imperial	Metric
Absorption by weight	ASTM C97	0.16%	0.16%
Density	ASTM C97	165.2 lb/ft ³	2 646.25 kg/m ³
Compressive strength	ASTM C170	23 277 Psi	160.49 MPa
Flexural strength	ASTM C880	1 740 Psi	12.0 MPa
Modulus of rupture	ASTM C99	2 364 Psi	16.30 MPa



PROPANE FLAMED

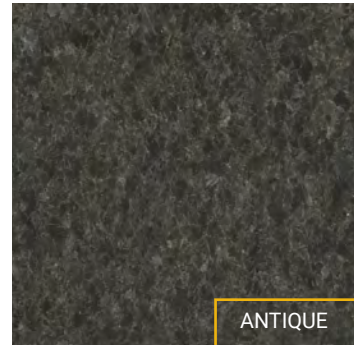

ANTIQUE

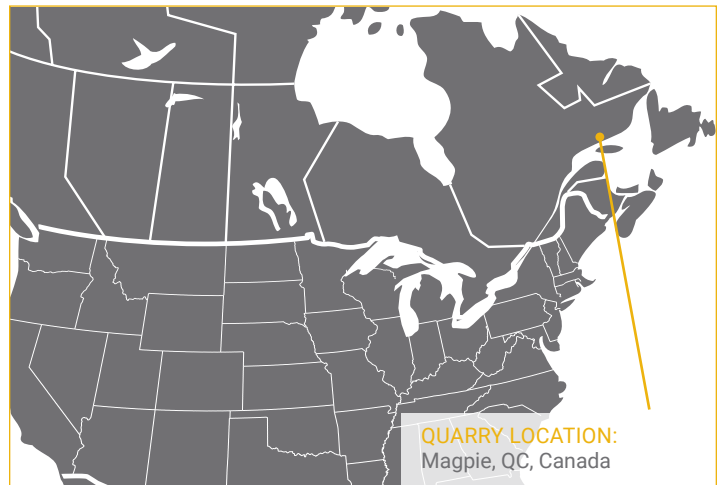

QUARRY LOCATION:
Magpie, QC, Canada

SAINT HENRY BLACK™

● GRANITE



POLISHED

DESCRIPTION

This granite is also known as Taillon, Péribonka and Canadian Black. Metallic crystals assemble to create a contemporary work of art on a black, textured canvas.

QUARRY OPERATING SINCE

1970

ANNUAL PRODUCTION

On demand

AVAILABLE FINISHES


Polished	Honed
Antique	Flamed

APPLICATIONS


Exterior	Horizontal	Commercial
Interior	Vertical	Residential

PHYSICAL TEST RESULTS

		Imperial	Metric
Absorption by weight	ASTM C97	0.056%	0.056%
Density	ASTM C97	177.2 lb/ft ³	2 838.47 kg/m ³
Compressive strength	ASTM C170	22 242 Psi	153.36 MPa
Flexural strength	ASTM C880	1 769 Psi	12.2 MPa
Modulus of rupture	ASTM C99	1 929 Psi	13.30 MPa



PROPANE FLAMED



ANTIQUE



QUARRY LOCATION:
Saint-Henri-de-Taillon, QC, Canada

SAINT SEBASTIEN™

● GRANITE



POLISHED

DESCRIPTION

Widely used for the construction of steps for churches and other important buildings, this granite is a heritage material in Quebec. Its grains are small and uniform and it has good structural properties. Its warm gray and subtle beige color is unique among any other architectural granite on the market and makes it easy to pair with other stones.

QUARRY OPERATING SINCE

1997

ANNUAL PRODUCTION


1,200 m³ and more
(42,000 cu. ft.)

AVAILABLE FINISHES


Polished
Antique

Honed
Waterjet

Flamed



PROPANE FLAMED

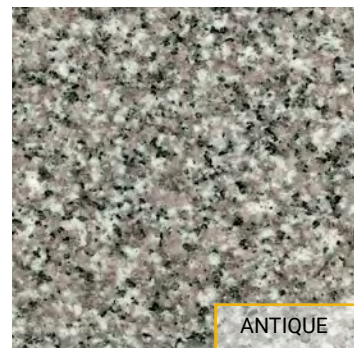

ANTIQUE

APPLICATIONS

Exterior
Interior

Horizontal
Vertical

Commercial
Residential

PHYSICAL TEST RESULTS

		Imperial	Metric
Absorption by weight	ASTM C97	0.27%	0.27%
Density	ASTM C97	163.8 lb/ft ³	2 623.82 kg/m ³
Compressive strength	ASTM C170	29 175 Psi	201.15 MPa
Flexural strength	ASTM C880	1 784 Psi	12.3 MPa
Modulus of rupture	ASTM C99	2 037 Psi	14.04 MPa



QUARRY LOCATION:
Saint-Sébastien, QC, Canada

STANSTEAD GREY™

● GRANITE



POLISHED

DESCRIPTION

STANSTEAD GREY™ granite is quarried in Stanstead, Quebec. This is a light to medium gray granite, with a medium and coarse grain. This granite is highly consistent in color.

QUARRY OPERATING SINCE


1920

ANNUAL PRODUCTION


7,000 m³ and more
(250,000 cu. ft.)

AVAILABLE FINISHES

Polished	Waterjet	Sandblasted
Antique	Propane flamed	
Honed	Plasma flamed	



PROPANE FLAMED

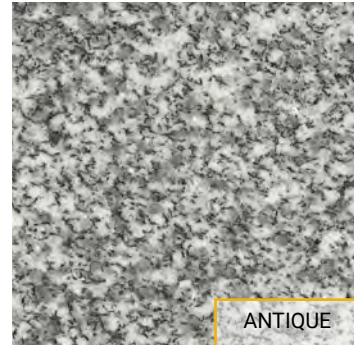


ANTIQUE

APPLICATIONS

Exterior	Horizontal	Commercial
Interior	Vertical	Residential

PHYSICAL TEST RESULTS

		Imperial	Metric
Absorption by weight	ASTM C97	0.30 %	0.30 %
Density	ASTM C97	166 lb/ft ³	2 659.9 kg/m ³
Compressive strength	ASTM C170	26 172.3 Psi	180.5 MPa
Flexural strength	ASTM C880	2 010.8 Psi	13.9 MPa
Modulus of rupture	ASTM C99	1836.3 Psi	12.7 Mpa

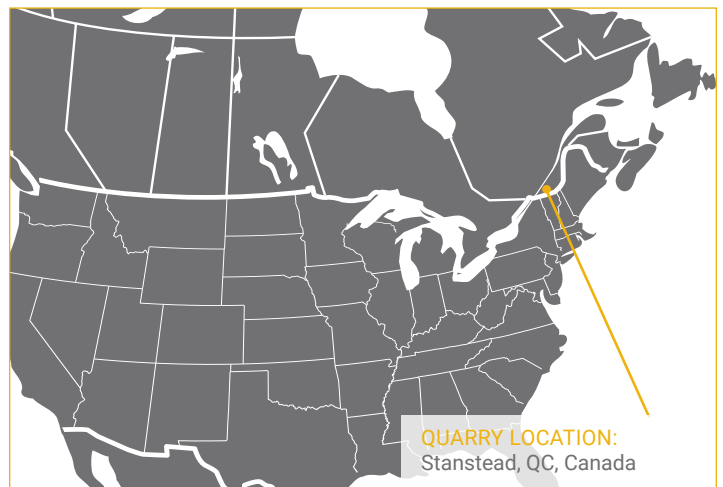

QUARRY LOCATION:
Stanstead, QC, Canada



POLYCOR
NATURAL STONE

QUARRY OWNERS | BLOCKS | SLABS | TILES | LANDSCAPING PRODUCTS | CURBS

polycor.com

Computer generated images and printed reproductions may not accurately match natural stone colors.

TITANIUM PEARL™

● GRANITE



DESCRIPTION

Quarried exclusively by Polycor, the primary color of this tight-grained granite is extremely stable. Its blue-gray hues and neutral tonality, similar to concrete, make it a popular choice in urban landscaping projects.

QUARRY OPERATING SINCE

2010

ANNUAL PRODUCTION

On demand

AVAILABLE FINISHES

Polished	Waterjet
Antique	Flamed

APPLICATIONS

Exterior	Horizontal	Commercial
Interior	Vertical	Residential

PHYSICAL TEST RESULTS


		Imperial	Metric
Absorption by weight	ASTM C97	0.15%	0.15%
Density	ASTM C97	170.3 lb/ft ³	2 728 kg/m ³
Compressive strength	ASTM C170	24 086 Psi	166.1 MPa
Flexural strength	ASTM C880	1 398 Psi	9.6 MPa
Modulus of rupture	ASTM C99	1 719.1 Psi	11.9 MPa




POLISHED



PROPANE FLAMED



ANTIQUE

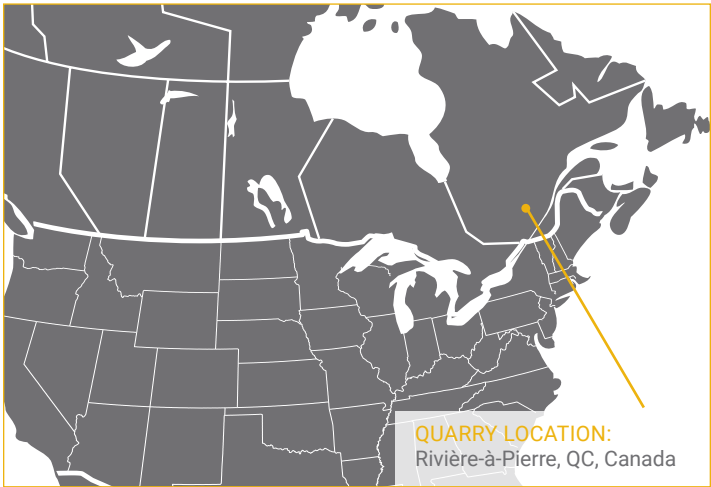


QUARRY LOCATION:
Rivière-à-Pierre, QC, Canada

WHITE MOUNT AIRY GRANITE™



● GRANITE

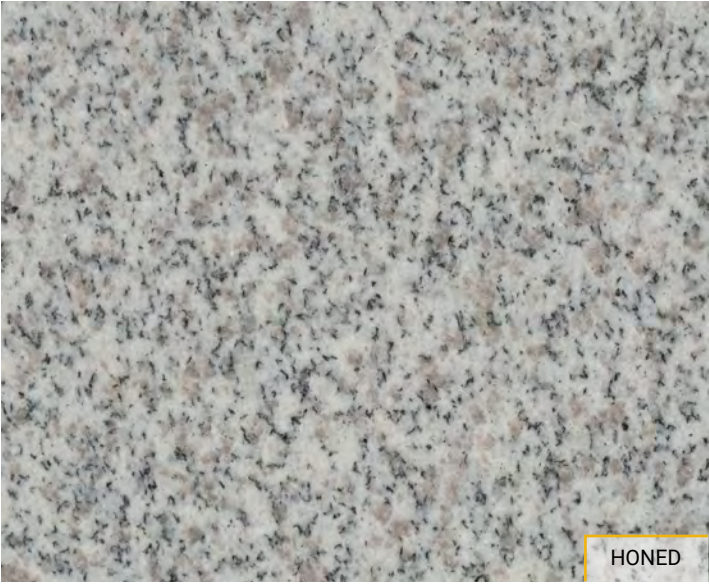

HONED

DESCRIPTION

An iconic, signature granite that has been used on projects around the world. Known for its unmistakable, predominantly white color, this granite also includes light gray, medium grain specks mixed throughout.

QUARRY OPERATING SINCE

1889

ANNUAL PRODUCTION

10,000 m³ and more
(355,000 cu. ft.)

AVAILABLE FINISHES

Polished	Waterjet	Sandblasted
Antique	Propane flamed	
Honed	Plasma flamed	

APPLICATIONS


Exterior	Vertical	Curbs
Interior	Commercial	Pavers
Horizontal	Residential	

PHYSICAL TEST RESULTS

		Imperial	Metric
Absorption by weight	ASTM C97	0.24%	0.24%
Density	ASTM C97	164.00 lb/ft ³	2 634.00 kg/m ³
Compressive strength	ASTM C170	23 920 Psi	164.90 MPa
Flexural strength	ASTM C880	1 900 Psi	13.10 MPa
Modulus of rupture	ASTM C99	2 090 Psi	14.40 MPa



POLISHED

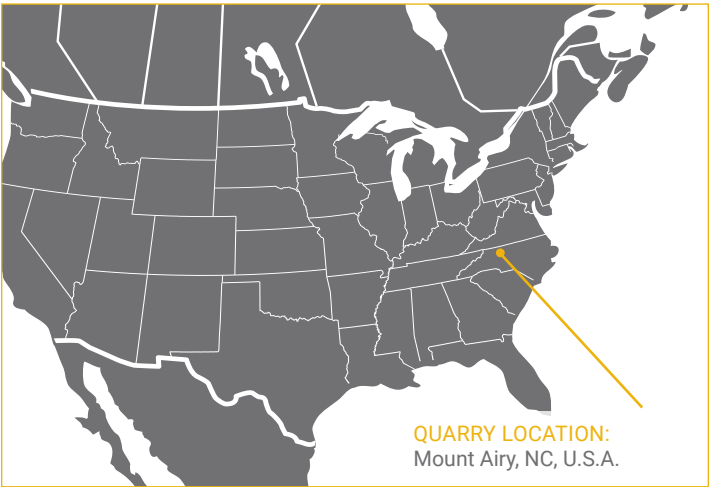

QUARRY LOCATION:
Mount Airy, NC, U.S.A.




QUARRY OWNERS | BLOCKS | SLABS | TILES | LANDSCAPING PRODUCTS | CURBS

polycor.com

Computer generated images and printed reproductions may not accurately match natural stone colors.

WOODBURY GRAY™

● GRANITE

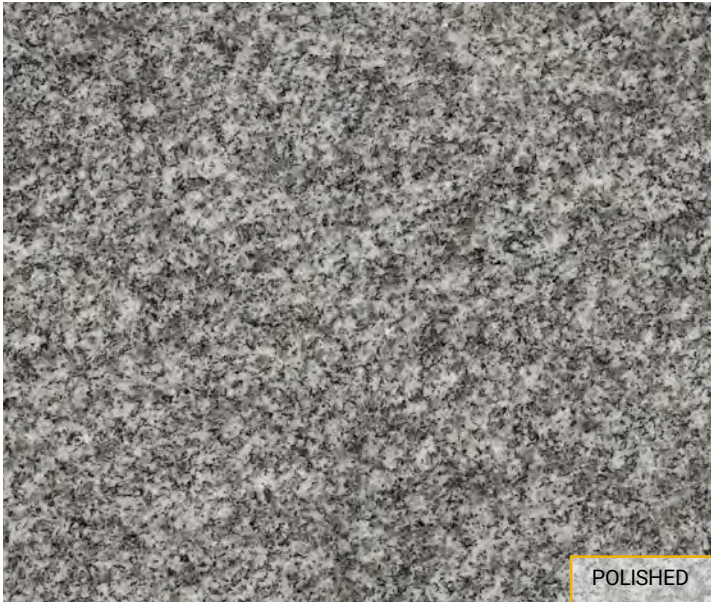

POLISHED

DESCRIPTION

WOODBURY GRAY™ granite is quarried in Woodbury, Vermont. This is a salt and pepper, light gray granite, with a medium tight grain and a consistent color.

QUARRY OPERATING SINCE

1883

ANNUAL PRODUCTION

12,500 m³ and more
(441,433 cu. ft.)

AVAILABLE FINISHES


Polished	Waterjet	Sandblasted
Antique	Propane flamed	
Honed	Plasma flamed	

APPLICATIONS

Exterior	Horizontal	Commercial
Interior	Vertical	Residential

PHYSICAL TEST RESULTS


		Imperial	Metric
Absorption by weight	ASTM C97	0.252%	0.252%
Density	ASTM C97	165 ± lb/ft³	2 643.05 ± kg/m³
Compressive strength	ASTM C170	17 007 Psi	117.26 MPa
Flexural strength	ASTM C880	1 374 Psi	9.5 MPa
Modulus of rupture	ASTM C99	1 617 Psi	11.15 MPa



PROPANE FLAMED



ANTIQUE

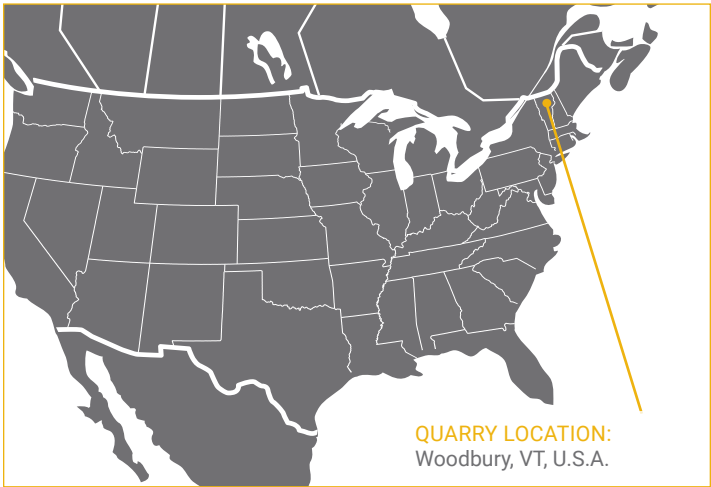

QUARRY LOCATION:
Woodbury, VT, U.S.A.

ALGONQUIN™ Fleuri cut

● LIMESTONE



DESCRIPTION

The subtle yet sophisticated character of this warm, earth-toned limestone creates a subdued ambiance in any space. Neutral and consistent in its minimal vein pattern, it also exhibits the occasional shell inclusions for added visual interest. Suitable for both exterior and interior applications, **ALGONQUIN™** fleuri is a unique and versatile limestone that pairs well with any color scheme.

QUARRY OPERATING SINCE

N/A

ANNUAL PRODUCTION

On demand

AVAILABLE FINISHES


Polished	Smooth	Sandblasted
Antique	Honed	

APPLICATIONS

Exterior	Horizontal	Commercial Residential
Interior	Vertical	


PHYSICAL TEST RESULTS

		Imperial	Metric
Absorption by weight	ASTM C97	1.60%	1.60%
Density	ASTM C97	160 lb/ft ³	2 565 kg/m ³
Compressive strength	ASTM C170	30 260 Psi	208.7 MPa
Flexural strength	ASTM C880	N/A	N/A
Modulus of rupture	ASTM C99	3 030 Psi	20.90 MPa

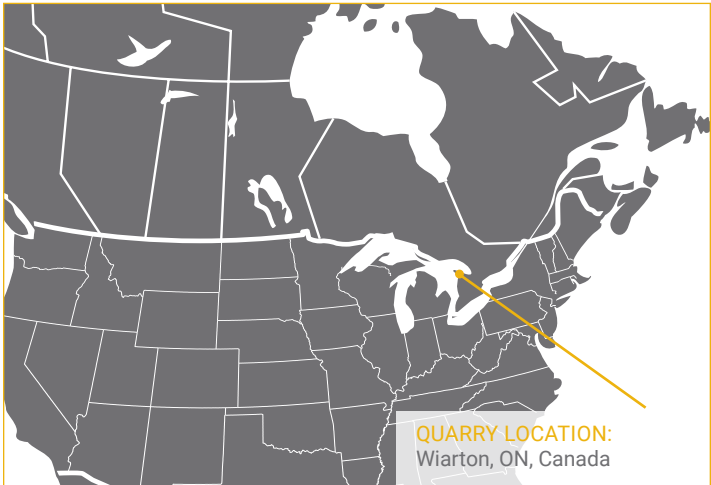

ALGONQUIN™ Linear cut

● LIMESTONE

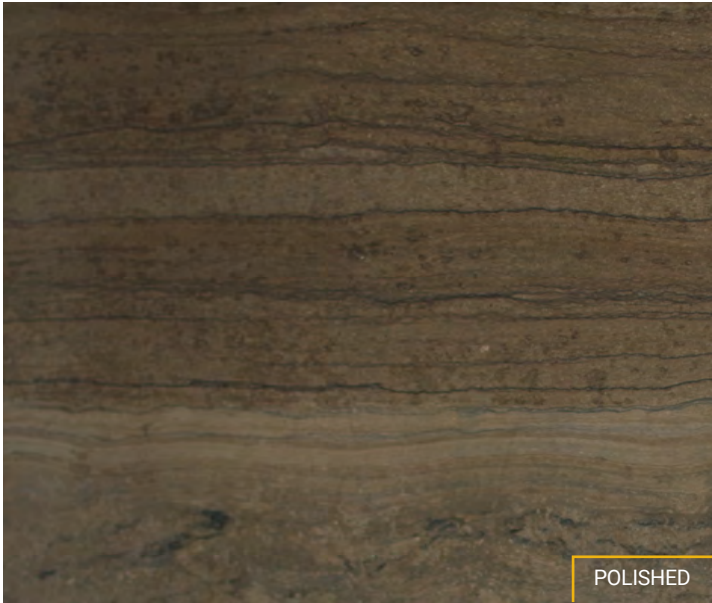

DESCRIPTION

The striated veins in this warm, earth-toned limestone create a bold design statement. Suitable for both exterior and interior applications, **ALGONQUIN™** linear is a unique and versatile limestone that is consistent in its vein pattern.

QUARRY OPERATING SINCE


N/A

ANNUAL PRODUCTION

On demand

AVAILABLE FINISHES

Polished	Smooth	Sandblasted
Antique	Honed	




APPLICATIONS

Exterior	Horizontal	Commercial
Interior	Vertical	Residential

PHYSICAL TEST RESULTS

		Imperial	Metric
Absorption by weight	ASTM C97	1.60%	1.60%
Density	ASTM C97	160 lb/ft ³	2 565 kg/m ³
Compressive strength	ASTM C170	30 260 Psi	208.7 MPa
Flexural strength	ASTM C880	N/A	N/A
Modulus of rupture	ASTM C99	3 030 Psi	20.90 MPa

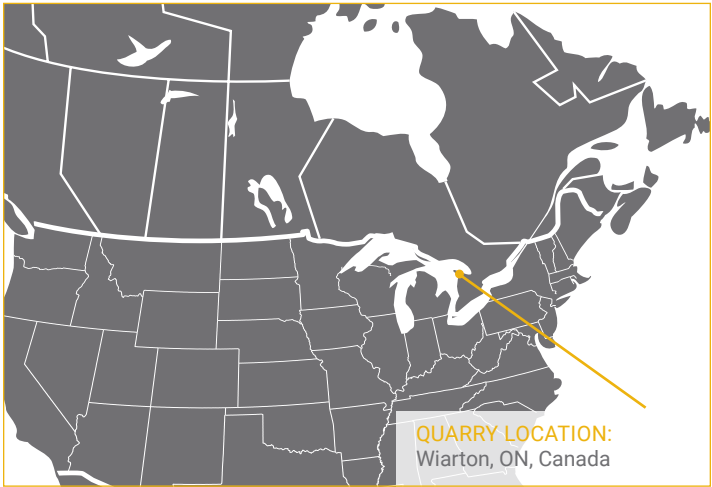

ERAMOSA Fleuri cut

LIMESTONE



DESCRIPTION


Few limestone exhibit the striking and dramatic patterns that **ERAMOSA** limestone does when cut in a fleuri finish. Take your design to the next level with this exclusive limestone hailing from the hills of picturesque Ontario, Canada. This limestone features cascading veins that swirl like the waters of the nearby rivers and lakes surrounding the peninsula where it is quarried.

QUARRY OPERATING SINCE

N/A

ANNUAL PRODUCTION

On demand



AVAILABLE FINISHES


Polished	Smooth	Sandblasted
Antique	Honed	

APPLICATIONS

Exterior	Horizontal	Commercial
Interior	Vertical	Residential

PHYSICAL TEST RESULTS

		Imperial	Metric
Absorption by weight	ASTM C97	0.08%	0.08%
Density	ASTM C97	172 lb/ft ³	2 777 kg/m ³
Compressive strength	ASTM C170	43 750 Psi	301.7 MPa
Flexural strength	ASTM C880	N/A	N/A
Modulus of rupture	ASTM C99	4 860 Psi	33.5 MPa

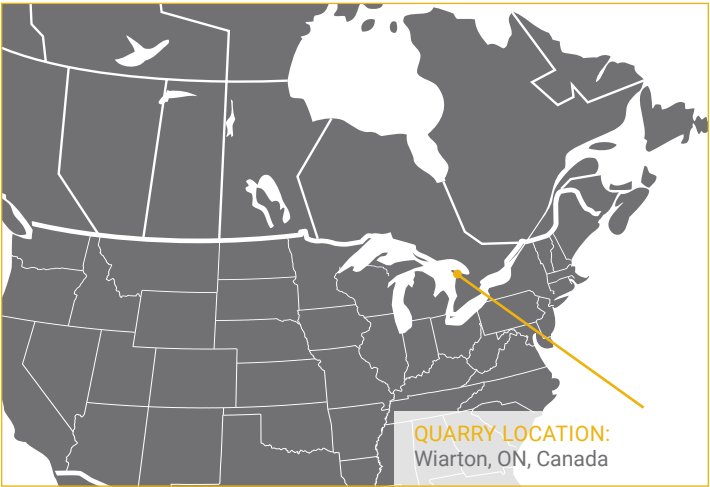


QUARRY OWNERS | BLOCKS | SLABS | TILES | LANDSCAPING PRODUCTS | CURBS

polycor.com

Computer generated images and printed reproductions may not accurately match natural stone colors.

ERAMOSA Linear cut

● LIMESTONE

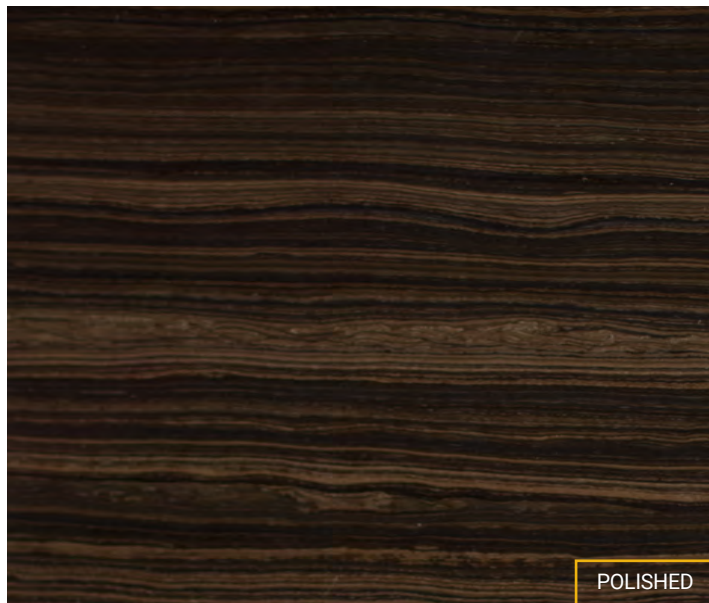

POLISHED

DESCRIPTION

ERAMOSA is a highly sought after limestone with some of the finest and elegant veining found anywhere, in any stone, worldwide. The soothing and warm alternating bands have a unique depth and translucency unrivaled by any other stone in this color range.

QUARRY OPERATING SINCE

N/A

ANNUAL PRODUCTION


On demand

AVAILABLE FINISHES

Polished	Smooth	Sandblasted
Antique	Honed	



SANDBLASTED




HONED

APPLICATIONS

Exterior	Horizontal	Commercial
Interior	Vertical	Residential

PHYSICAL TEST RESULTS

		Imperial	Metric
Absorption by weight	ASTM C97	0.08%	0.08%
Density	ASTM C97	172 lb/ft ³	2 777 kg/m ³
Compressive strength	ASTM C170	43 750 Psi	301.7 MPa
Flexural strength	ASTM C880	N/A	N/A
Modulus of rupture	ASTM C99	4 860 Psi	33.5 MPa

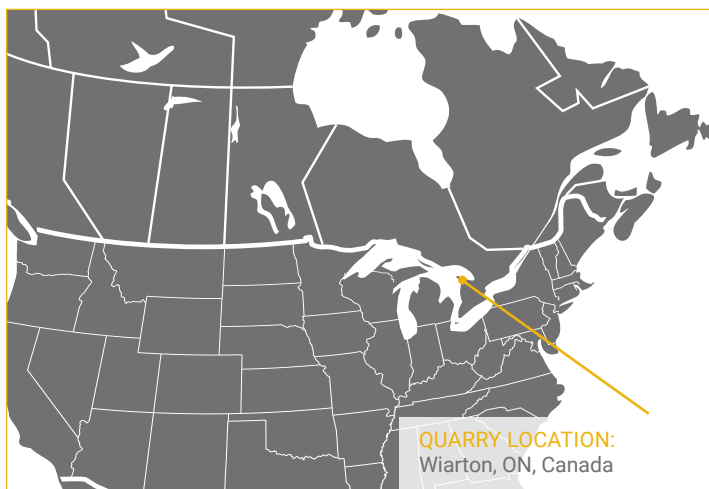

QUARRY LOCATION:
Warton, ON, Canada



POLYCOR
NATURAL STONE

QUARRY OWNERS | BLOCKS | SLABS | TILES | LANDSCAPING PRODUCTS | CURBS

polycor.com

Computer generated images and printed reproductions may not accurately match natural stone colors.

INDIANA LIMESTONE - FOSSIL BEIGE™

● LIMESTONE



DESCRIPTION

A medium to large grained limestone keeping within a gray tonal range of light to medium gray shades that exhibits unique features and fossilized inclusions for a neutral, subtly veined, and rustic aesthetic.

QUARRY OPERATING SINCE

1897

ANNUAL PRODUCTION

2,000 m³ and more
(70,629 cu. ft.)

AVAILABLE FINISHES

Honed	Bush-Hammered	Split Face
Sandblasted	Wire Brushed	Tumbled

APPLICATIONS

Exterior	Horizontal	Commercial
Interior	Vertical	Residential


PHYSICAL TEST RESULTS

		Imperial	Metric
Absorption by weight	ASTM C97	7.5%	7.5%
Density	ASTM C97	144 lb/ft ³	2 306.66 kg/m ³
Compressive strength	ASTM C170	4 000 Psi	27.58 MPa
Modulus of rupture	ASTM C99	700 Psi	4.83 MPa

NATURALLY SUSTAINABLE™

Health Product Declaration® available **2020**

ANSI/NSC 373 Certified Quarry since **2018**

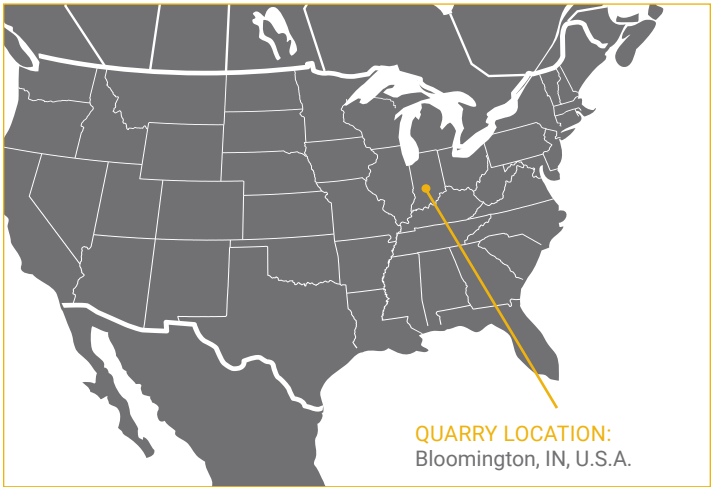

QUARRY OWNERS | BLOCKS | SLABS | TILES | LANDSCAPING PRODUCTS | CURBS

polycor.com

Computer generated images and printed reproductions may not accurately match natural stone colors.

INDIANA LIMESTONE - FULL COLOR BLEND™



● LIMESTONE



DESCRIPTION

A natural, full range compilation of warm buff colors and medium gray tones are present within this historic limestone. Subtle veining meanders throughout the surface creating a unique movement in this medium grained, standard grade stone.

QUARRY OPERATING SINCE

1897

ANNUAL PRODUCTION

12,000 m³ and more
(423,776 cu. ft.)

AVAILABLE FINISHES

Honed
Sandblasted

Bush-Hammered
Wire Brushed

Split Face
Tumbled

APPLICATIONS

Exterior
Interior

Horizontal
Vertical

Commercial
Residential

PHYSICAL TEST RESULTS

		Imperial	Metric
Absorption by weight	ASTM C97	7.5%	7.5%
Density	ASTM C97	144 lb/ft ³	2 306.66 kg/m ³
Compressive strength	ASTM C170	4 000 Psi	27.58 MPa
Modulus of rupture	ASTM C99	700 Psi	4.83 MPa


NATURALLY SUSTAINABLE™

Health Product Declaration® available **2020**

ANSI/NSC 373 Certified Quarry since **2018**



HONED

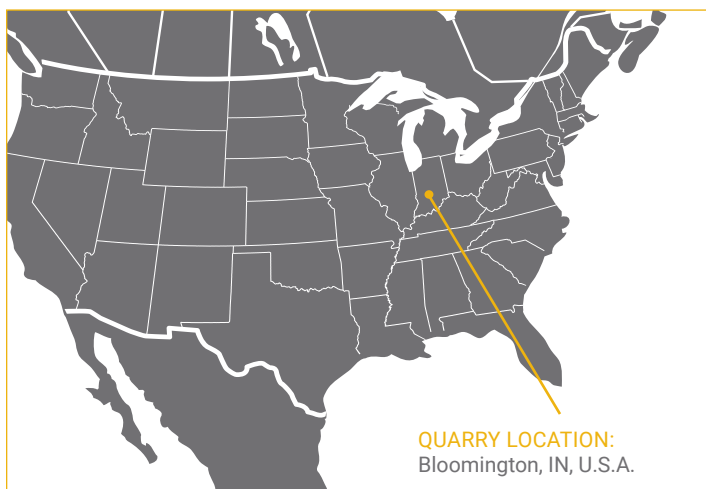

QUARRY LOCATION:
Bloomington, IN, U.S.A.



POLYCOR
NATURAL STONE

QUARRY OWNERS | BLOCKS | SLABS | TILES | LANDSCAPING PRODUCTS | CURBS

polycor.com

Computer generated images and printed reproductions may not accurately match natural stone colors.

INDIANA LIMESTONE - RUSTIC BUFF™



● LIMESTONE



DESCRIPTION

This traditional buff colored limestone ranges in hue from warm cream to light brown, all with a visible vein movement throughout the surface. The medium to coarse grained composition exhibits unique inclusions for a variegated appearance.

QUARRY OPERATING SINCE

1897

ANNUAL PRODUCTION

6,000 m³ and more
(211,888 cu. ft.)

AVAILABLE FINISHES

Honed	Bush-Hammered	Split Face
Sandblasted	Wire Brushed	Tumbled

APPLICATIONS

Exterior	Horizontal	Commercial
Interior	Vertical	Residential

PHYSICAL TEST RESULTS

		Imperial	Metric
Absorption by weight	ASTM C97	7.5%	7.5%
Density	ASTM C97	144 lb/ft ³	2 306.66 kg/m ³
Compressive strength	ASTM C170	4 000 Psi	27.58 MPa
Modulus of rupture	ASTM C99	700 Psi	4.83 MPa


NATURALLY SUSTAINABLE™

Health Product Declaration® available **2020**

ANSI/NSC 373 Certified Quarry since **2018**



HONED

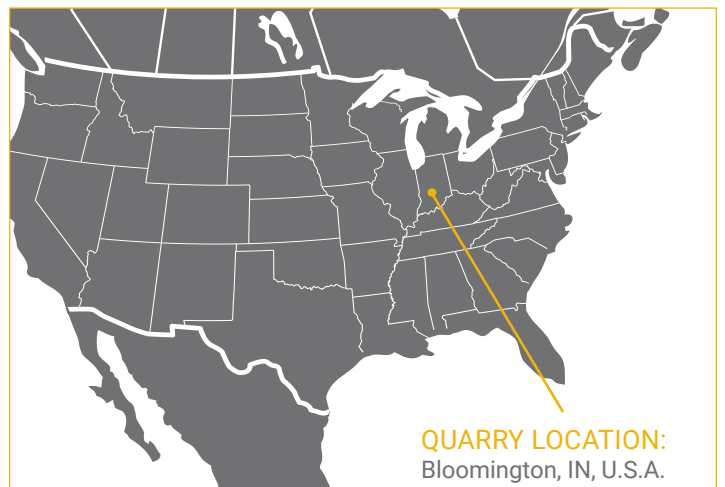

QUARRY LOCATION:
Bloomington, IN, U.S.A.



POLYCOR
NATURAL STONE

QUARRY OWNERS | BLOCKS | SLABS | TILES | LANDSCAPING PRODUCTS | CURBS

polycor.com

Computer generated images and printed reproductions may not accurately match natural stone colors.

INDIANA LIMESTONE - RUSTIC GRAY™



● LIMESTONE



DESCRIPTION

A medium to large grained limestone keeping within a gray tonal range of light to medium gray shades that exhibits unique features and fossilized inclusions for a neutral, subtly veined, and rustic aesthetic.

QUARRY OPERATING SINCE

1897

ANNUAL PRODUCTION

2,000 m³ and more
(70,629 cu. ft.)

AVAILABLE FINISHES

Honed	Bush-Hammered	Split Face
Sandblasted	Wire Brushed	Tumbled

APPLICATIONS

Exterior	Horizontal	Commercial
Interior	Vertical	Residential

PHYSICAL TEST RESULTS

		Imperial	Metric
Absorption by weight	ASTM C97	7.5%	7.5%
Density	ASTM C97	144 lb/ft ³	2 306.66 kg/m ³
Compressive strength	ASTM C170	4 000 Psi	27.58 MPa
Modulus of rupture	ASTM C99	700 Psi	4.83 MPa


NATURALLY SUSTAINABLE™

Health Product Declaration® available **2020**

ANSI/NSC 373 Certified Quarry since **2018**



HONED

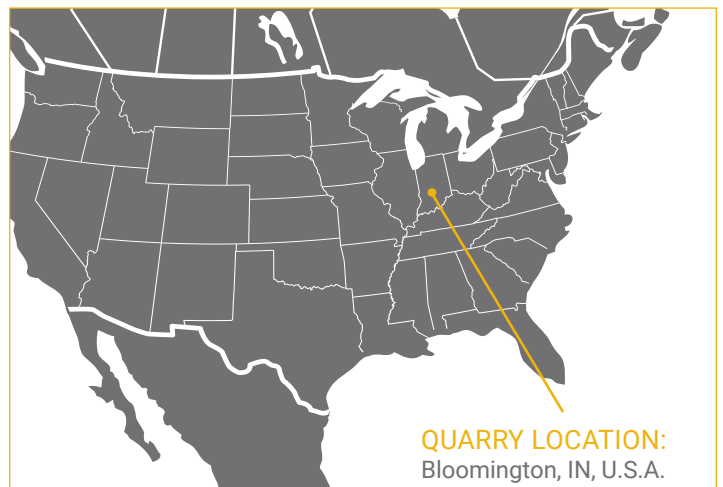

QUARRY LOCATION:
Bloomington, IN, U.S.A.



POLYCOR
NATURAL STONE

QUARRY OWNERS | BLOCKS | SLABS | TILES | LANDSCAPING PRODUCTS | CURBS

polycor.com

Computer generated images and printed reproductions may not accurately match natural stone colors.

INDIANA LIMESTONE - STANDARD BUFF™

● LIMESTONE



DESCRIPTION

This traditional buff shade of Indiana Limestone ranges from a warm cream to light brown with muted veining and slight grain movement visible in the surface. Its fine to medium grain composition have made it a prized material for architectural ornamentation on iconic buildings across North America.

QUARRY OPERATING SINCE

1897

ANNUAL PRODUCTION

18,400 m³ and more
(650,000 cu. ft.)

AVAILABLE FINISHES

Honed	Bush-Hammered	Split Face
Sandblasted	Wire Brushed	Tumbled

APPLICATIONS

Exterior	Horizontal	Commercial
Interior	Vertical	Residential

PHYSICAL TEST RESULTS

		Imperial	Metric
Absorption by weight	ASTM C97	7.5%	7.5%
Density	ASTM C97	144 lb/ft ³	2 306.66 kg/m ³
Compressive strength	ASTM C170	4 000 Psi	27.58 MPa
Modulus of rupture	ASTM C99	700 Psi	4.83 MPa


NATURALLY SUSTAINABLE™

Health Product Declaration® available **2020**

ANSI/NSC 373 Certified Quarry since **2018**



HONED

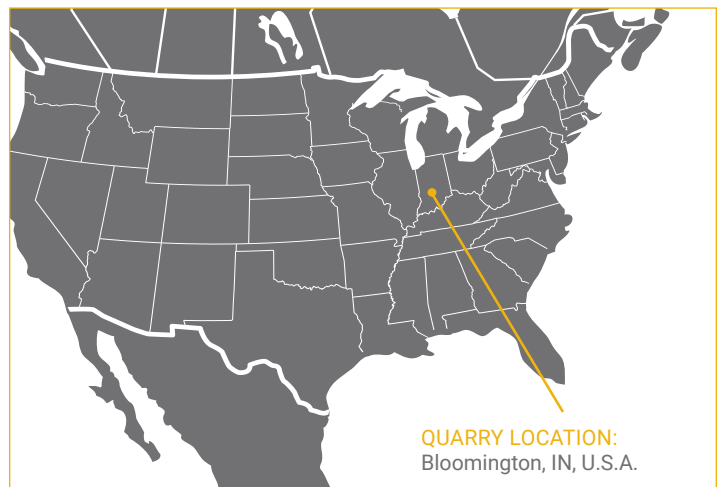

QUARRY LOCATION:
Bloomington, IN, U.S.A.



QUARRY OWNERS | BLOCKS | SLABS | TILES | LANDSCAPING PRODUCTS | CURBS

polycor.com

Computer generated images and printed reproductions may not accurately match natural stone colors.

INDIANA LIMESTONE - STANDARD GRAY™



● LIMESTONE



DESCRIPTION

This neutral limestone possesses a subdued palette featuring light to medium shades of gray. A restrained, underlying vein pattern and subtle grain movement are visible in the fine to medium grained surface.

QUARRY OPERATING SINCE

1897

ANNUAL PRODUCTION

12,000 m³ and more
(423,776 cu. ft.)

AVAILABLE FINISHES

Honed
Sandblasted

Bush-Hammered
Wire Brushed

Split Face
Tumbled

APPLICATIONS

Exterior
Interior

Horizontal
Vertical

Commercial
Residential

PHYSICAL TEST RESULTS

		Imperial	Metric
Absorption by weight	ASTM C97	7.5%	7.5%
Density	ASTM C97	144 lb/ft ³	2 306.66 kg/m ³
Compressive strength	ASTM C170	4 000 Psi	27.58 MPa
Modulus of rupture	ASTM C99	700 Psi	4.83 MPa


NATURALLY SUSTAINABLE™

Health Product Declaration® available **2020**

ANSI/NSC 373 Certified Quarry since **2018**



HONED

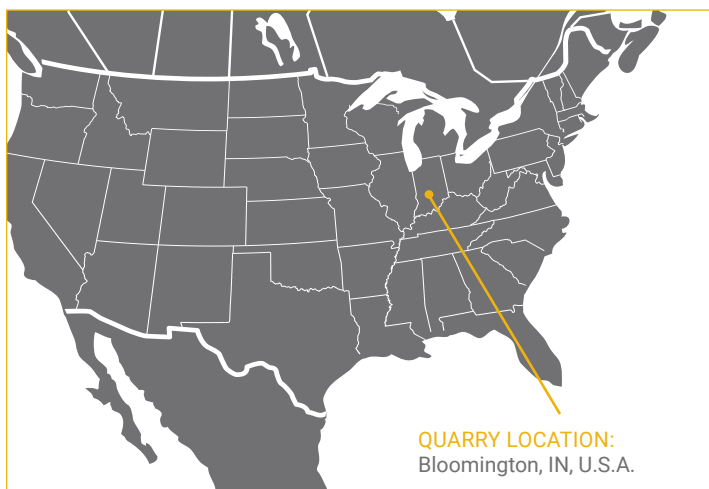

QUARRY LOCATION:
Bloomington, IN, U.S.A.



POLYCOR
NATURAL STONE

QUARRY OWNERS | BLOCKS | SLABS | TILES | LANDSCAPING PRODUCTS | CURBS

polycor.com

Computer generated images and printed reproductions may not accurately match natural stone colors.

INDIANA LIMESTONE - STANDARD SILVER BUFF™



● LIMESTONE



DESCRIPTION

A neutral, cool gray buff limestone featuring subtle silver colored veining in the foreground and a fine to medium grained mineral structure.

QUARRY OPERATING SINCE

1897

ANNUAL PRODUCTION

6,000 m³ and more
(211,888 cu. ft.)

AVAILABLE FINISHES

Honed
Sandblasted

Bush-Hammered
Wire Brushed

Split Face
Tumbled

APPLICATIONS

Exterior
Interior

Horizontal
Vertical

Commercial
Residential


PHYSICAL TEST RESULTS

		Imperial	Metric
Absorption by weight	ASTM C97	7.5%	7.5%
Density	ASTM C97	144 lb/ft ³	2 306.66 kg/m ³
Compressive strength	ASTM C170	4 000 Psi	27.58 MPa
Modulus of rupture	ASTM C99	700 Psi	4.83 MPa

NATURALLY SUSTAINABLE™

Health Product Declaration® available **2020**

ANSI/NSC 373 Certified Quarry since **2018**

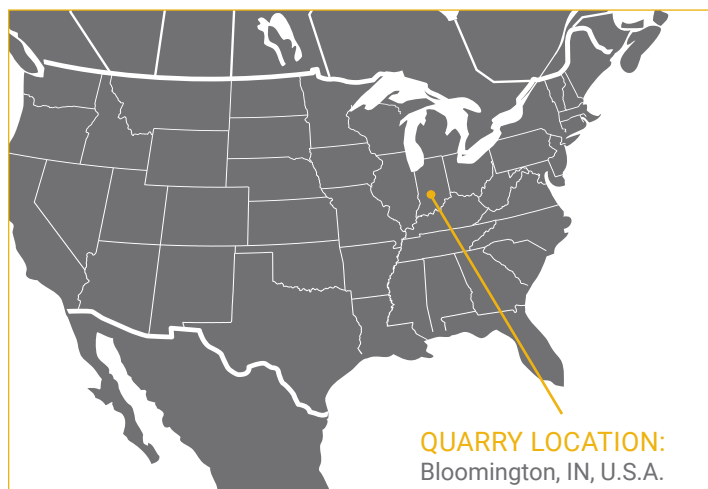

QUARRY LOCATION:
Bloomington, IN, U.S.A.




POLYCOR
NATURAL STONE

QUARRY OWNERS | BLOCKS | SLABS | TILES | LANDSCAPING PRODUCTS | CURBS

polycor.com

Computer generated images and printed reproductions may not accurately match natural stone colors.

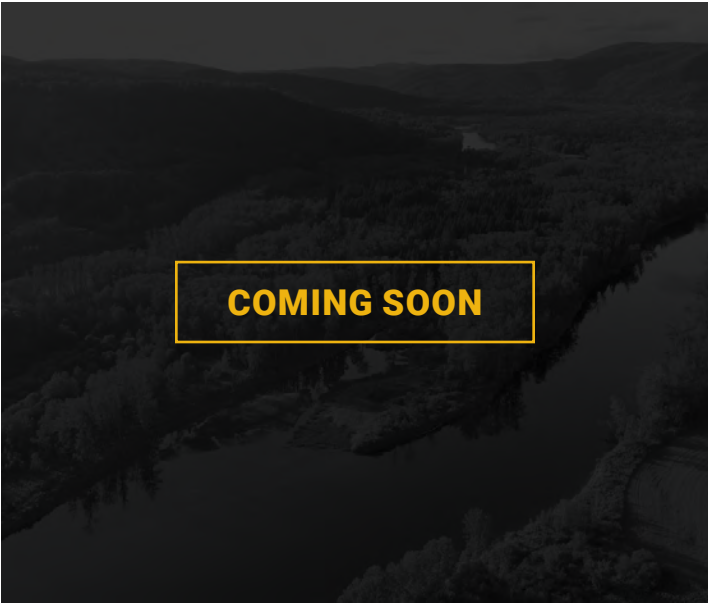

DESCRIPTION

Strikingly rich in colors that can only come from the harsh Canadian climate, the Cascapedia stone is a breccia-type marble that can be found in the castles and aristocratic residences of Europe. Pure sophistication !

QUARRY OPERATING SINCE

2004

ANNUAL PRODUCTION

1 800 m³ and more
(65 000 cu. ft.)

AVAILABLE FINISHES

Polished Sandblasted
Antique

APPLICATIONS


Interior Vertical Residential
Horizontal Commercial Memorials

PHYSICAL TEST RESULTS

		Imperial	Metric
Absorption by weight	ASTM C97	0.29%	0.29%
Density	ASTM C97	167.2 lb/ft³	2 678.29 kg/m³
Compressive strength	ASTM C170	18 579 Psi	128.10 MPa
Flexural strength	ASTM C880	1 116.8 Psi	7.7 MPa
Modulus of rupture	ASTM C99	1 117 Psi	7.70 MPa

NATURALLY SUSTAINABLE™

Health Product Declaration® available 2020

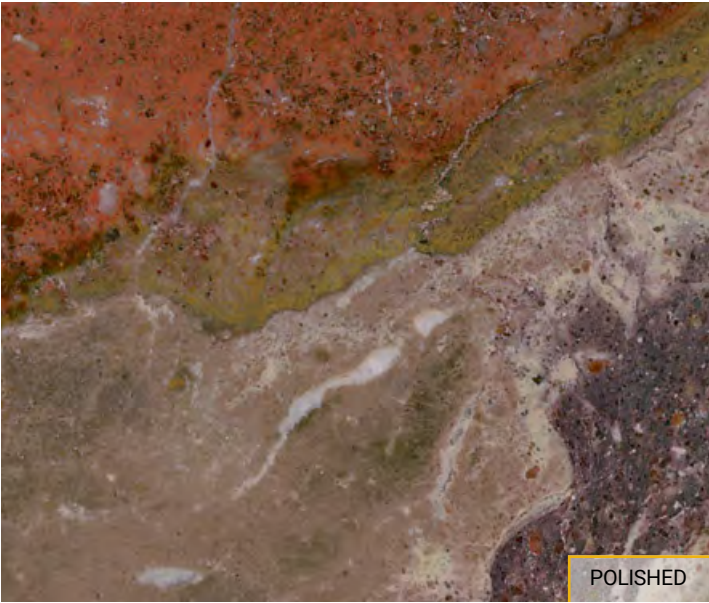

GEORGIA MARBLE™ ETOWAH™



● MARBLE



DESCRIPTION

The huge quarry for this exclusive Polycor™ marble extends from Tate to Marble Hill, Georgia. This is why it was widely used in historical American architecture.

QUARRY OPERATING SINCE

1900

ANNUAL PRODUCTION

500 m³ and more
(18 000 cu. ft.)

AVAILABLE FINISHES

Polished

Honed

Antique

Sandblasted

APPLICATIONS

Exterior

Horizontal

Commercial

Interior

Vertical

Residential



PHYSICAL TEST RESULTS

		Imperial	Metric
Absorption by weight	ASTM C97	0.07%	0.07%
Density	ASTM C97	170.4 lb/ft³	2 729.55 kg/m³
Compressive strength	ASTM C170	10 852 Psi	74.82 MPa
Flexural strength	ASTM C880	1 644 Psi	11.34 MPa
Modulus of rupture	ASTM C99	1 589 Psi	10.96 MPa

NATURALLY SUSTAINABLE™

Health Product Declaration® available **2020**

ANSI/NSC 373 Certified Quarry since **2019**

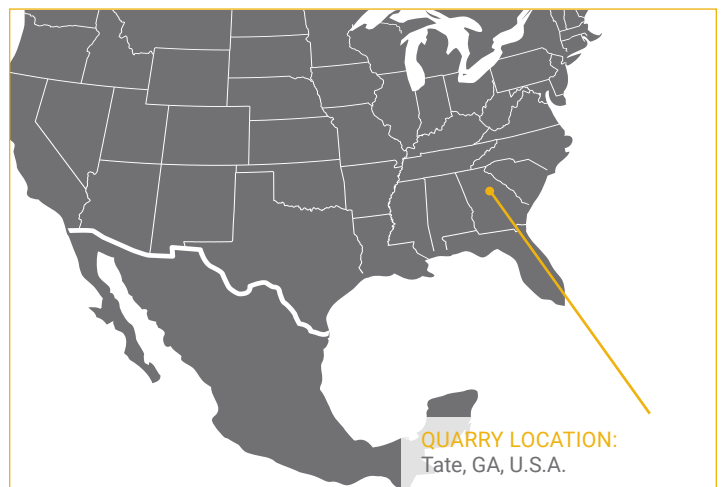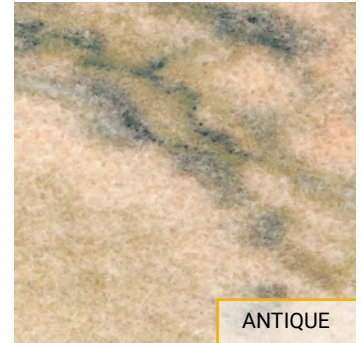

QUARRY LOCATION:
Tate, GA, U.S.A.



POLYCOR
NATURAL STONE

QUARRY OWNERS | BLOCKS | SLABS | TILES | LANDSCAPING PRODUCTS | CURBS


polycor.com

Computer generated images and printed reproductions may not accurately match natural stone colors.

GEORGIA MARBLE™ PEARL GREY™



● MARBLE

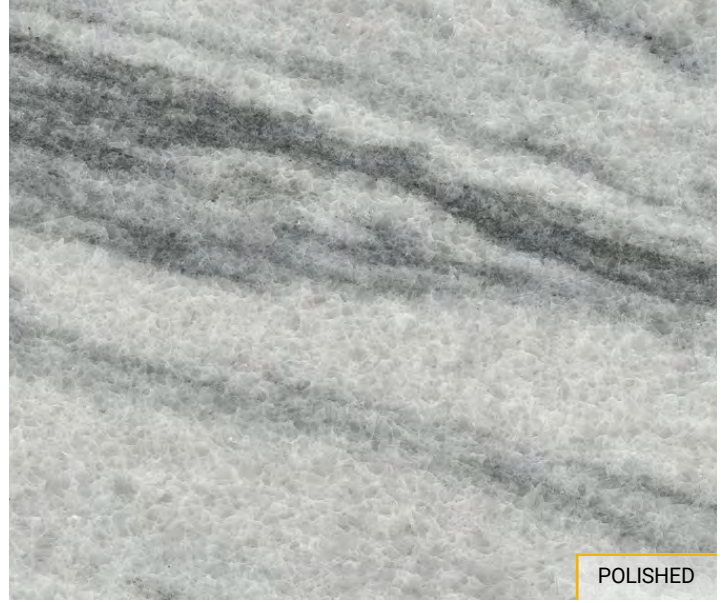

POLISHED

DESCRIPTION

The thin, closely-packed and homogenous grain structure of this North American marble gives superior strength and resistance, which explains why it has been used for more than a century in indoor and outdoor architectural projects. Its white, gray and black veins create interesting movement. GEORGIA MARBLE™ PEARL GREY™ comes from the same quarry as GEORGIA MARBLE™ WHITE CHEROKEE™.

QUARRY OPERATING SINCE

1884

ANNUAL PRODUCTION

1 000 m³ and more
(35 000 cu. ft.)

AVAILABLE FINISHES

Antique Polished
Honed Sandblasted

APPLICATIONS

Exterior Horizontal Commercial
Interior Vertical Residential


PHYSICAL TEST RESULTS

		Imperial	Metric
Absorption by weight	ASTM C97	0.09%	0.09%
Density	ASTM C97	169.4 lb/ft ³	2 713.53 kg/m ³
Compressive strength	ASTM C170	9 505 Psi	65.53 MPa
Flexural strength	ASTM C880	1 192 Psi	8.22 MPa
Modulus of rupture	ASTM C99	1 374 Psi	9.47 MPa

NATURALLY SUSTAINABLE™

Health Product Declaration® available **2020**


ANSI/NSC 373 Certified Quarry since **2019**



SANDBLASTED



ANTIQUE

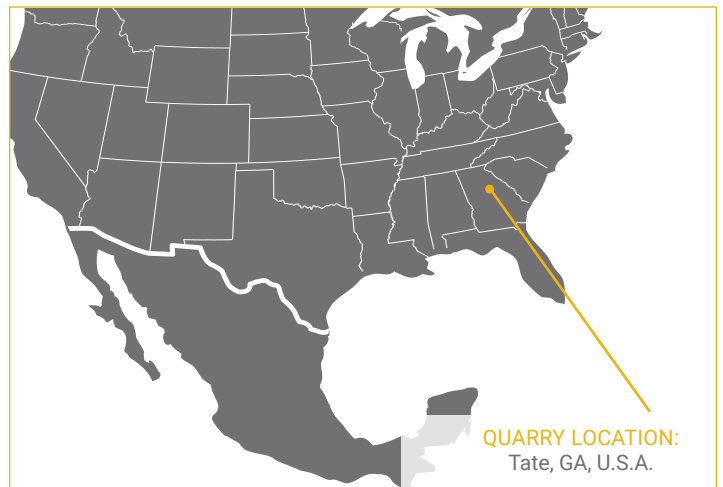

QUARRY LOCATION:
Tate, GA, U.S.A.



POLYCOR
NATURAL STONE


QUARRY OWNERS | BLOCKS | SLABS | TILES | LANDSCAPING PRODUCTS | CURBS

polycor.com

Computer generated images and printed reproductions may not accurately match natural stone colors.

GEORGIA MARBLE™ SOLAR GREY™

● MARBLE

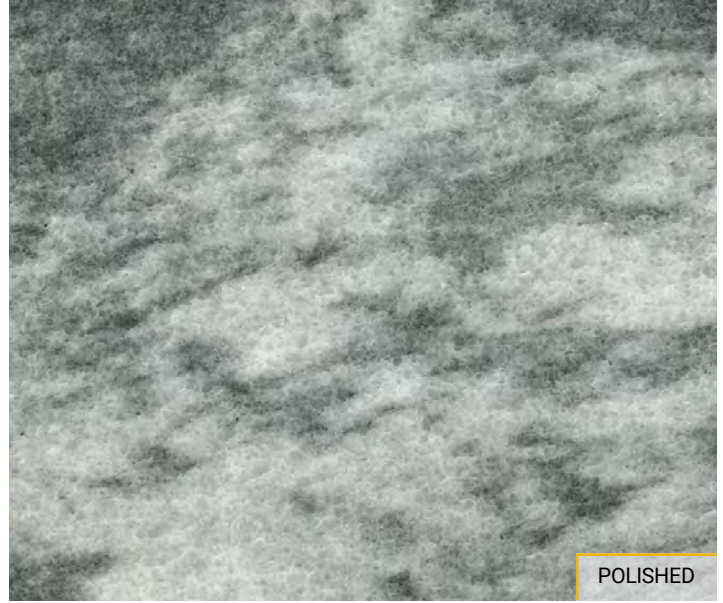

POLISHED

DESCRIPTION

This homogenous and closely-packed marble features a variable gray and black vein distribution. It has excellent durability in indoor and outdoor architectural applications. GEORGIA MARBLE™ SOLAR GREY™ comes from the same quarry as GEORGIA MARBLE™ WHITE CHEROKEE™.

QUARRY OPERATING SINCE

1884

ANNUAL PRODUCTION

300 m³ and more
(10 000 cu. ft.)

AVAILABLE FINISHES

Polished Honed
Antique Sandblasted

APPLICATIONS


Exterior Horizontal Commercial
Interior Vertical Residential

PHYSICAL TEST RESULTS


		Imperial	Metric
Absorption by weight	ASTM C97	0.09%	0.09%
Density	ASTM C97	169.4 lb/ft ³	2 713.53 kg/m ³
Compressive strength	ASTM C170	9 505 Psi	65.53 MPa
Flexural strength	ASTM C880	1 192 Psi	8.22 MPa
Modulus of rupture	ASTM C99	1 374 Psi	9.47 MPa



SANDBLASTED

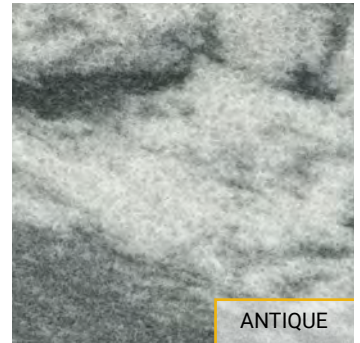

ANTIQUE

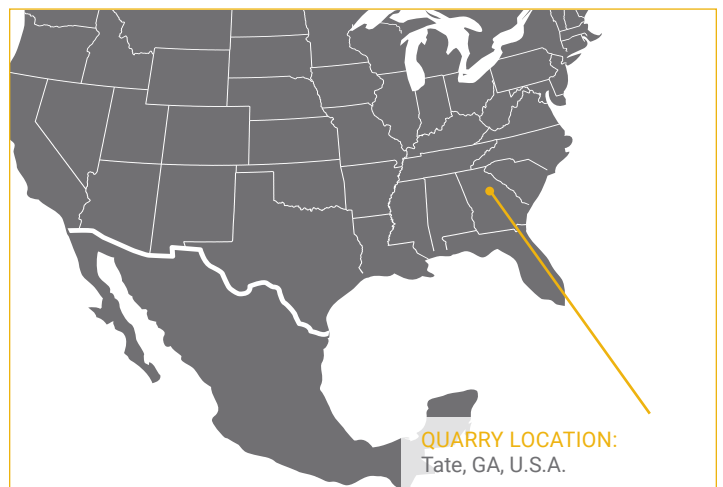

QUARRY LOCATION:
Tate, GA, U.S.A.

NATURALLY SUSTAINABLE™

Health Product Declaration® available **2020**

ANSI/NSC 373 Certified Quarry since **2019**



QUARRY OWNERS | BLOCKS | SLABS | TILES | LANDSCAPING PRODUCTS | CURBS

polycor.com

Computer generated images and printed reproductions may not accurately match natural stone colors.

GEORGIA MARBLE™ WHITE CHEROKEE™



● MARBLE



POLISHED

DESCRIPTION

This marble comes from an extensive quarry that has been operated for more than a century. Stylish GEORGIA MARBLE - WHITE CHEROKEE™ is one of the most homogenous marbles, and is used in large architectural projects and American heritage building restorations. It's also an excellent choice for countertops.

QUARRY OPERATING SINCE

1884

ANNUAL PRODUCTION

5 500 m³ and more
(250 000 cu. ft.)

AVAILABLE FINISHES

Polished Honed
Antique Sandblasted

APPLICATIONS

Exterior Horizontal Commercial
Interior Vertical Residential

PHYSICAL TEST RESULTS


		Imperial	Metric
Absorption by weight	ASTM C97	0.08%	0.08%
Density	ASTM C97	169.2 lb/ft³	2 710 kg/m³
Compressive strength	ASTM C170	11 860 Psi	88.77 MPa
Flexural strength	ASTM C880	1 296 Psi	8.94 MPa
Modulus of rupture	ASTM C99	1 520 Psi	10.48 MPa



SANDBLASTED



ANTIQUE

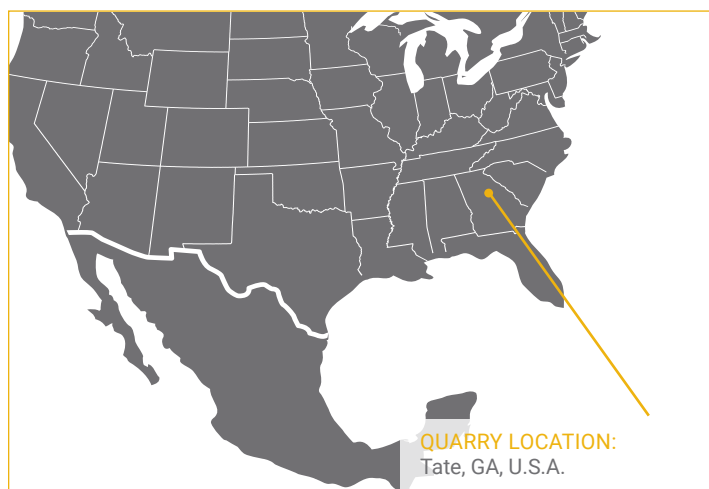

QUARRY LOCATION:
Tate, GA, U.S.A.

NATURALLY SUSTAINABLE™

Health Product Declaration® available **2020**

ANSI/NSC 373 Certified Quarry since **2019**



POLYCOR
NATURAL STONE

QUARRY OWNERS | BLOCKS | SLABS | TILES | LANDSCAPING PRODUCTS | CURBS

polycor.com

Computer generated images and printed reproductions may not accurately match natural stone colors.

GEORGIA MARBLE™ WHITE GEORGIA™



● MARBLE



POLISHED

DESCRIPTION

Renowned for many generations, this classic marble has gone into the building of historical American landmarks. It comes from the hills of Georgia and is brilliant white.

QUARRY OPERATING SINCE

1884

ANNUAL PRODUCTION

500 m³ and more
(20 000 cu. ft.)

AVAILABLE FINISHES

Polished
Antique

Honed
Sandblasted

APPLICATIONS


Exterior
Interior

Horizontal
Vertical


Commercial
Residential

PHYSICAL TEST RESULTS


		Imperial	Metric
Absorption by weight	ASTM C97	0.10%	0.10%
Density	ASTM C97	169.5 lb/ft ³	2,715.13 kg/m ³
Compressive strength	ASTM C170	13,650 Psi	94.11 MPa
Flexural strength	ASTM C880	1,700 Psi	11.72 MPa
Modulus of rupture	ASTM C99	2,190 Psi	15.10 MPa



SANDBLASTED

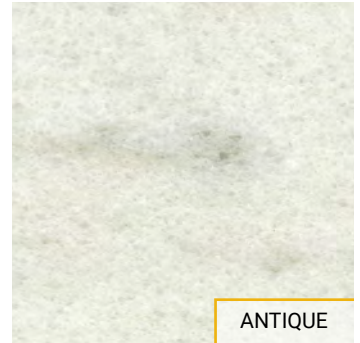

ANTIQUE

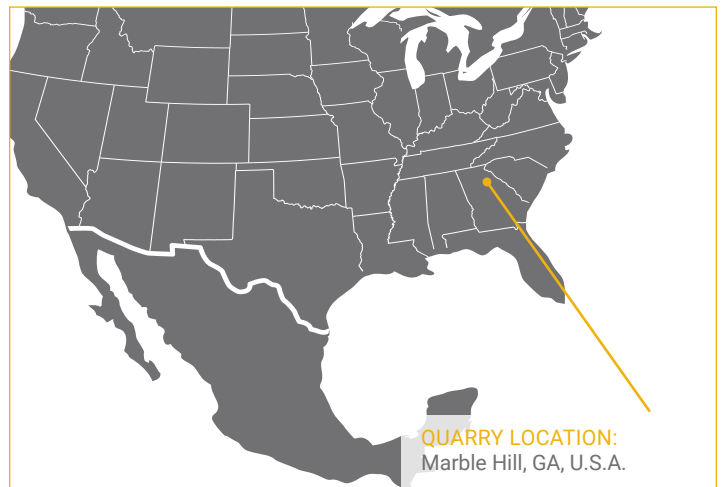

QUARRY LOCATION:
Marble Hill, GA, U.S.A.

NATURALLY SUSTAINABLE™

Health Product Declaration® available **2020**

ANSI/NSC 373 Certified Quarry since **2019**



POLYCOR
NATURAL STONE

QUARRY OWNERS | BLOCKS | SLABS | TILES | LANDSCAPING PRODUCTS | CURBS

polycor.com

Computer generated images and printed reproductions may not accurately match natural stone colors.