

GREENE COUNTY GRANITE®

● GRANITE



HONED

DESCRIPTION

An evenly structured, granular granite containing medium-coarse grains and featuring a white background with pale taupe and light-green tones scattered throughout. Fine, gray and black grains are clustered between larger patches of feldspar and quartz crystal.

QUARRY OPERATING SINCE | ANNUAL PRODUCTION

1889

On demand

AVAILABLE FINISHES

Polished	Waterjet	Sandblasted
Antique	Propane flamed	
Honed	Plasma flamed	

APPLICATIONS

Exterior	Vertical	Curbs
Interior	Commercial	Pavers
Horizontal	Residential	

PHYSICAL TEST RESULTS


		Imperial	Metric
Absorption by weight	ASTM C97	0.25%	0.25%
Density	ASTM C97	171.99 lb/ft ³	2 755.02 kg/m ³
Compressive strength	ASTM C170	28 180 Psi	194.29 MPa
Flexural strength	ASTM C880	1 219 Psi	8.4 MPa
Modulus of rupture	ASTM C99	2 438 Psi	16.81 MPa



FLAMED



POLISHED

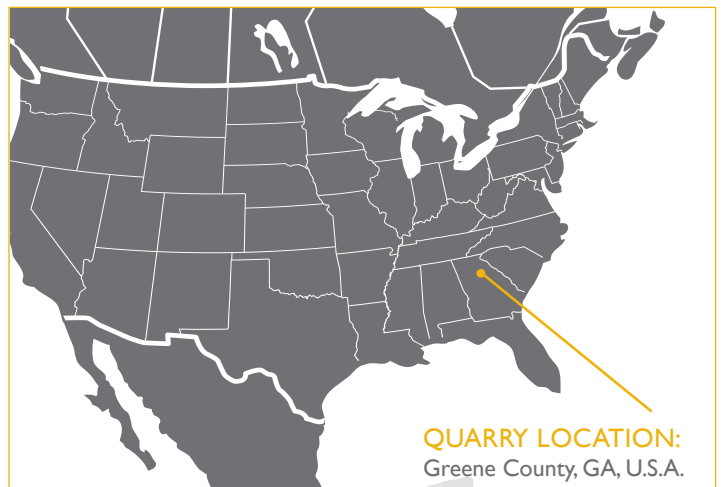

QUARRY LOCATION:
Greene County, GA, U.S.A.



POLYCOR

QUARRY OWNERS | BLOCKS | SLABS | TILES | LANDSCAPING PRODUCTS | CURBS

polycor.com

Computer generated images and printed reproductions may not accurately match natural stone colors.